

Outdoor Cove Lighting
CROWN NARROW



Outdoor Cove Lighting

CROWN NARROW



- Quick connection
- Narrow beam angle
- Dimmable, 1-10V dimming to 10%-100%
- Linkable, max.linkable length: 72' @120VAC, 156' @277VAC
- Lockable, precision aiming adjustment: ±85°vertical rotation
- IP rating: IP66 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F (-25°C~50°C)
- 10W/ft, 1000lm/ft
- Material: Aluminum alloy
- Other color temp available



Dimensions: (inches/mm)



How to order using our catalog numbers
 Example: CROWN NARROW-1230K3060SS


Series	Length	CCT (K)	Beam Angle	Finish	Installation
CROWN NARROW	12 - 11.8" (300mm)	30K - 3000K	3060 - 30°×60°	S - Silver	S - Screw Mounting
	47 - 47" (1200mm)	40K - 4000K			
	70 - 70" (1778mm)				

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm
CROWN NARROW-1230K3060SS	CROWN NARROW-L12-277V	120-277	85	10	1000
CROWN NARROW-1240K3060SS					
CROWN NARROW-4730K3060SS	CROWN NARROW-L45-277V	120-277	85	40	4000
CROWN NARROW-4740K3060SS					
CROWN NARROW-7030K3060SS	CROWN NARROW-L72-277V	120-277	85	60	6000
CROWN NARROW-7040K3060SS					

* 1pc LED fixture, 2pcs screws, 1pc cable end cap.


Photometrics

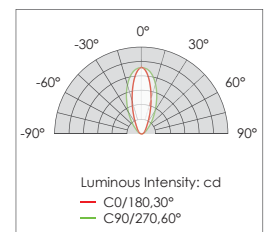

Outdoor Cove Lighting

CROWN/CROWN NARROW

Wiring Diagram

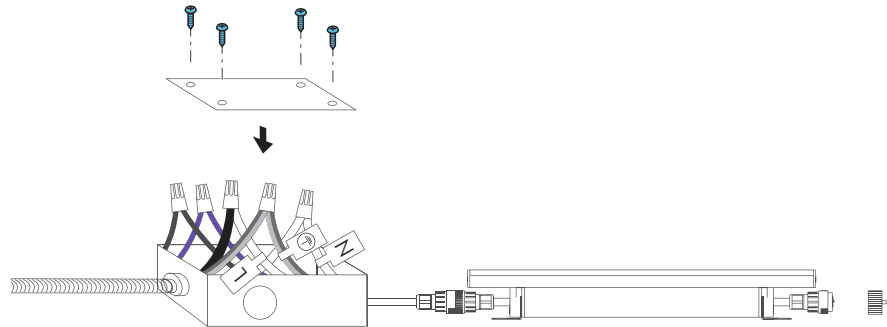


AC connection :

Black: " L "

White: " N "

Yellow/green: " ⊕ "




Dimming connection :


Violet: " + " ———

Gray: " - " ———

Accessories


Catalog No.	Description	Length (inch)
IC-CROWN-59	 Input cable	59"

Accessories(optional)

Catalog No.	Description	Length (inch)
SC-CROWN-12	 Soft connector	12"

Outdoor Cove Lighting CROWN/CROWN NARROW

Installation

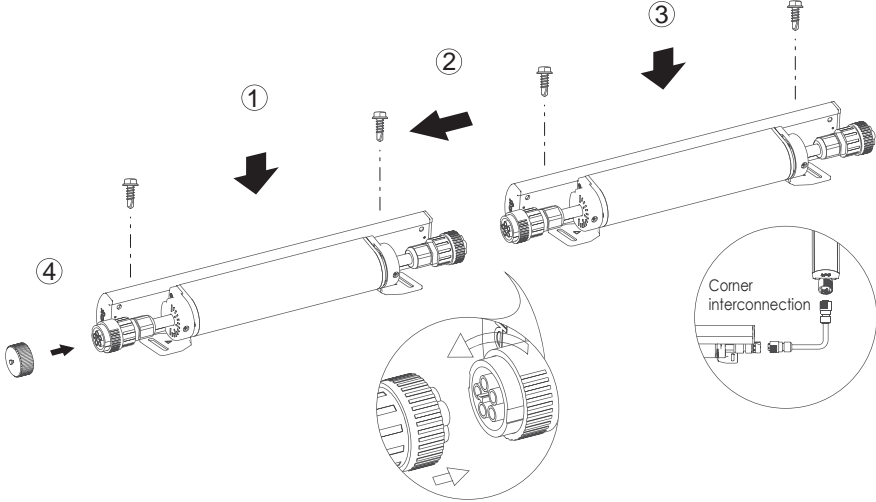

Application

