

Outdoor Cove Lighting
CROWN



Outdoor Cove Lighting

CROWN



- Quick connection
- Dimmable, 1-10V dimming to 10%-100%
- Linkable, max. linkable length: 72' @120VAC, 156' @277VAC
- Lockable, precision aiming adjustment: ±85°vertical rotation
- IP rating: IP66 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F (-25°C~50°C)
- 10W/ft, 1050lm/ft
- Material: Aluminum alloy
- Other color temp available



Dimensions: (inches/mm)



How to order using our catalog numbers

Example: CROWN-1230K110SS


Series	Length	CCT (K)	Beam Angle	Finish	Installation
CROWN	12 - 11.8"(300mm)	30K - 3000K	110 - 110°	S - Silver	S - Screw Mounting
	47 - 47"(1120mm)	40K - 4000K			
	70 - 70"(1778mm)				

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm
CROWN-1230K110SS	CROWN-L24-277V	120-277	85	10	1050
CROWN-1240K110SS					
CROWN-4730K110SS	CROWN-L90-277V	120-277	85	40	4200
CROWN-4740K110SS					
CROWN-7030K110SS	CROWN-L144-277V	120-277	85	60	6300
CROWN-7040K110SS					

* Included: 1 pc LED fixture, 2pcs screws, 1pc cable end cap.


Photometrics

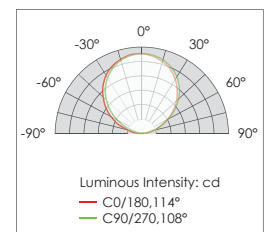

Outdoor Cove Lighting

CROWN/CROWN NARROW

Wiring Diagram

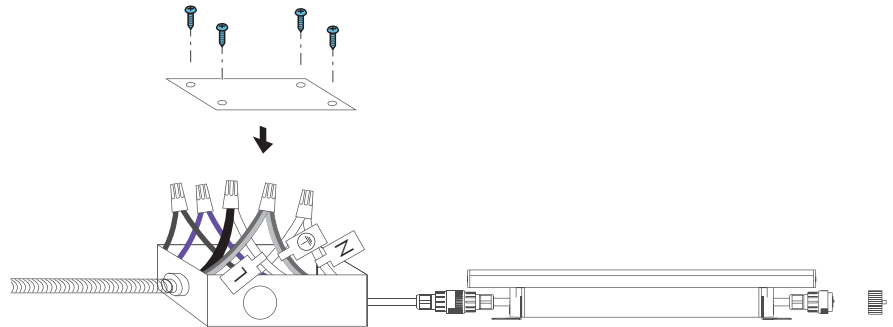


AC connection :

Black: " L "

White: " N "

Yellow/green: " ⊕ "




Dimming connection :


Violet: " + " ———

Gray: " - " ———

Accessories


Catalog No.	Description	Length (inch)
IC-CROWN-59	 Input cable	59"

Accessories(optional)

Catalog No.	Description	Length (inch)
SC-CROWN-12	 Soft connector	12"

Outdoor Cove Lighting CROWN/CROWN NARROW

Installation

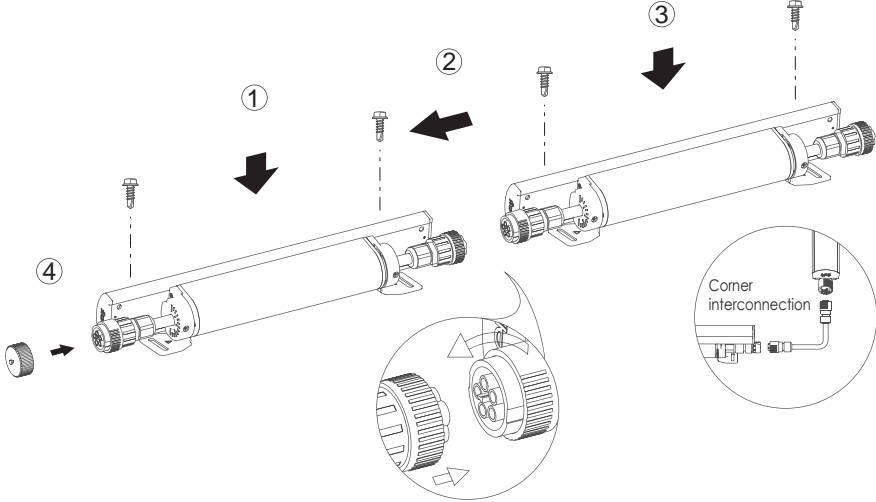

Application

