

Shelf lighting
LINCUS




Shelf lighting LINCUS



- Plug & play (External power supply)
- Wide beam angle
- Bright and consistent illuminance for display area
- Dark spot free at the linking point
- Linkable, max. linkable length: 10' per run
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -4°F~95°F (-20°C~35°C)
- 3W/ft, 240lm/ft (@4000K)
- Material: Aluminum alloy
- Other color temp available



Dimensions: (inches/mm)

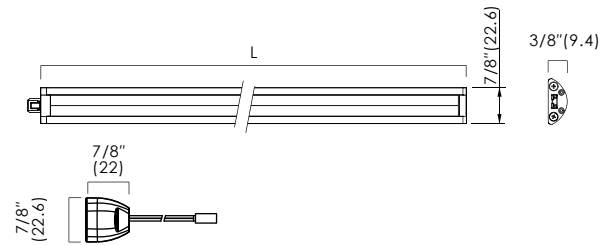

How to order using our catalog numbers
Example: LINCUS-1130K90SC0


Series	Length	CCT (K)	Beam Angle	Finish	Installation
LINCUS	11 - 10.4"(264.7mm)	30 - 3000K	90 - 90°	S - Silver	C0 - Mounting Clip 0°
	17 - 16.4"(417.3mm)	40 - 4000K			
	23 - 22.4"(569.7mm)				

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm	40W (NA159-4024LA-12A6)	75W (NA159-7524LA-12A6)	96W (NA383-9624DLA-DG6-12A6)
LINCUS-1130K90SC0	LINCUS-L12-24V-1	24	85	2.8	224	12pcs	22pcs	29pcs
LINCUS-1140K90SC0								
LINCUS-1730K90SC0	LINCUS-L18-24V-1	24	85	4.2	336	8pcs	15pcs	19pcs
LINCUS-1740K90SC0								
LINCUS-2330K90SC0	LINCUS-L24-24V-1	24	85	5.6	448	6pcs	11pcs	14pcs
LINCUS-2340K90SC0								

* 1pc LED fixture, 2pcs Screws, 2pcs Mounting clips, 1pc End cap.
[1]: Max. Length Per UL Listed LED Power Supply.

Photometrics



Linear lighting LINCUS

Cone Lux Diagram

Vertical & Horizontal Beamwidth

Center Beam FC

	110°	LINCUS-L12-24V-1		LINCUS-L18-24V-1		LINCUS-L24-24V-1	
		3000K	4000K	3000K	4000K	3000K	4000K
12"	41-5/8"	90	90	121	121	143	143
18"	62-3/8"	44	44	62	62	80	80
24"	83-1/8"	25	25	37	37	47	47
30"	103-7/8"	17	17	24	24	32	32
H	D	224 lm	224 lm	336 lm	336 lm	448 lm	448 lm


Accessories

Catalog No.

Description


Length (inch)

IC-LC-59




Input cable
(must be between light and splitter)

NA159-4024LA-12A6

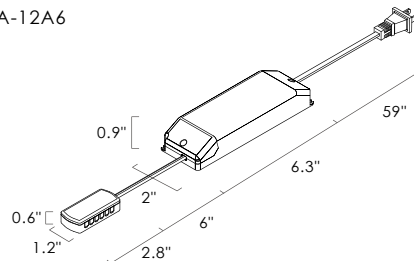






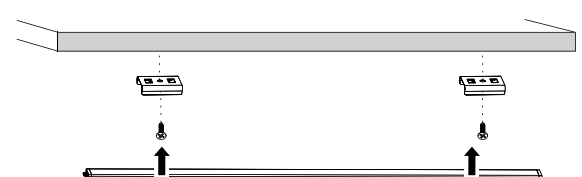
Model: SLT40-24VL-UN-A
Matching driver, max. 40W.
Input: 100-120VAC NA plug 1 + 59" cable.
Output: 24VDC 12-way splitter JB-12A + 6" cable.

NA159-7524LA-12A6

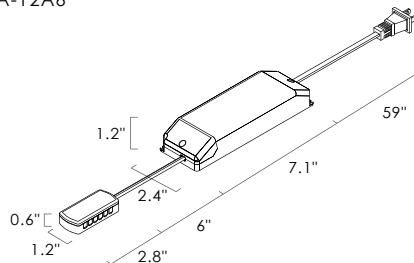

Model: SLT75-24VL-2A
Matching driver, max. 75W.
Input: 100-120VAC NA plug 1 + 59" cable.
Output: 24VDC 12-way splitter JB-12A + 6" cable.

Linear lighting LINCUS

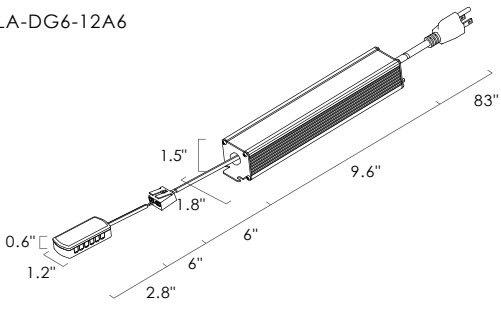Accessories	Catalog No.	Description	Length (inch)
	NA383-9624DLA-DG6-12A6	 <p>Model: SLD96-24VC-UN1-A Matching 1-10V dimmable driver, max. 96W. Input: 120-250VAC NA3 plug + 83" cable. Output: 24VDC DG238 DEGSON connector + 6" cable + 12-way splitter JB-12A + 6" cable.</p>	-
Accessories (optional)	Catalog No.	Description	Length (inch)
	MC-LC (included)	 <p>Mounting clips x2</p>	-
	SC-LC-2	 <p>Soft connector</p>	2"
	SC-LC-12	 <p>Soft connector</p>	12"
	MMC-LC	 <p>Magnetic mounting clips x2</p>	-
Installation	Non-magnetic surface installation		
	Magnetic surface installation	