

# Power Track Management

## MNTK



# Power Track Management

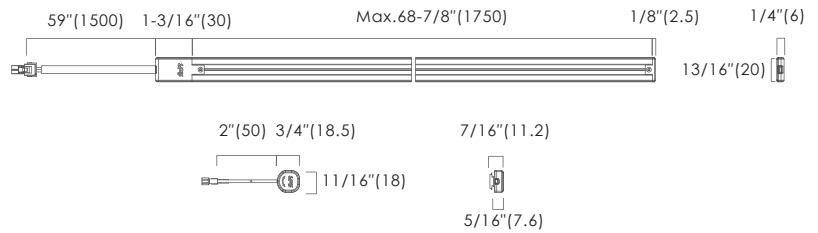
## MNTK







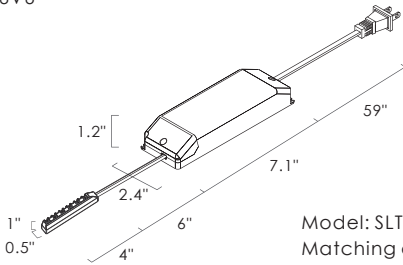
- Track system for low voltage, max 12V, 5A or 24V, 4A
- For adapter(MNTK-MNVS-2), max 2A.
- Super slim design to be hidden by shelves
- Easy installation by double side adhesive tape
- Adapter free installation with no direction limit
- Ta:-13°F~122°F (-25 C ~50 C)



**Dimensions: (inches/mm)**



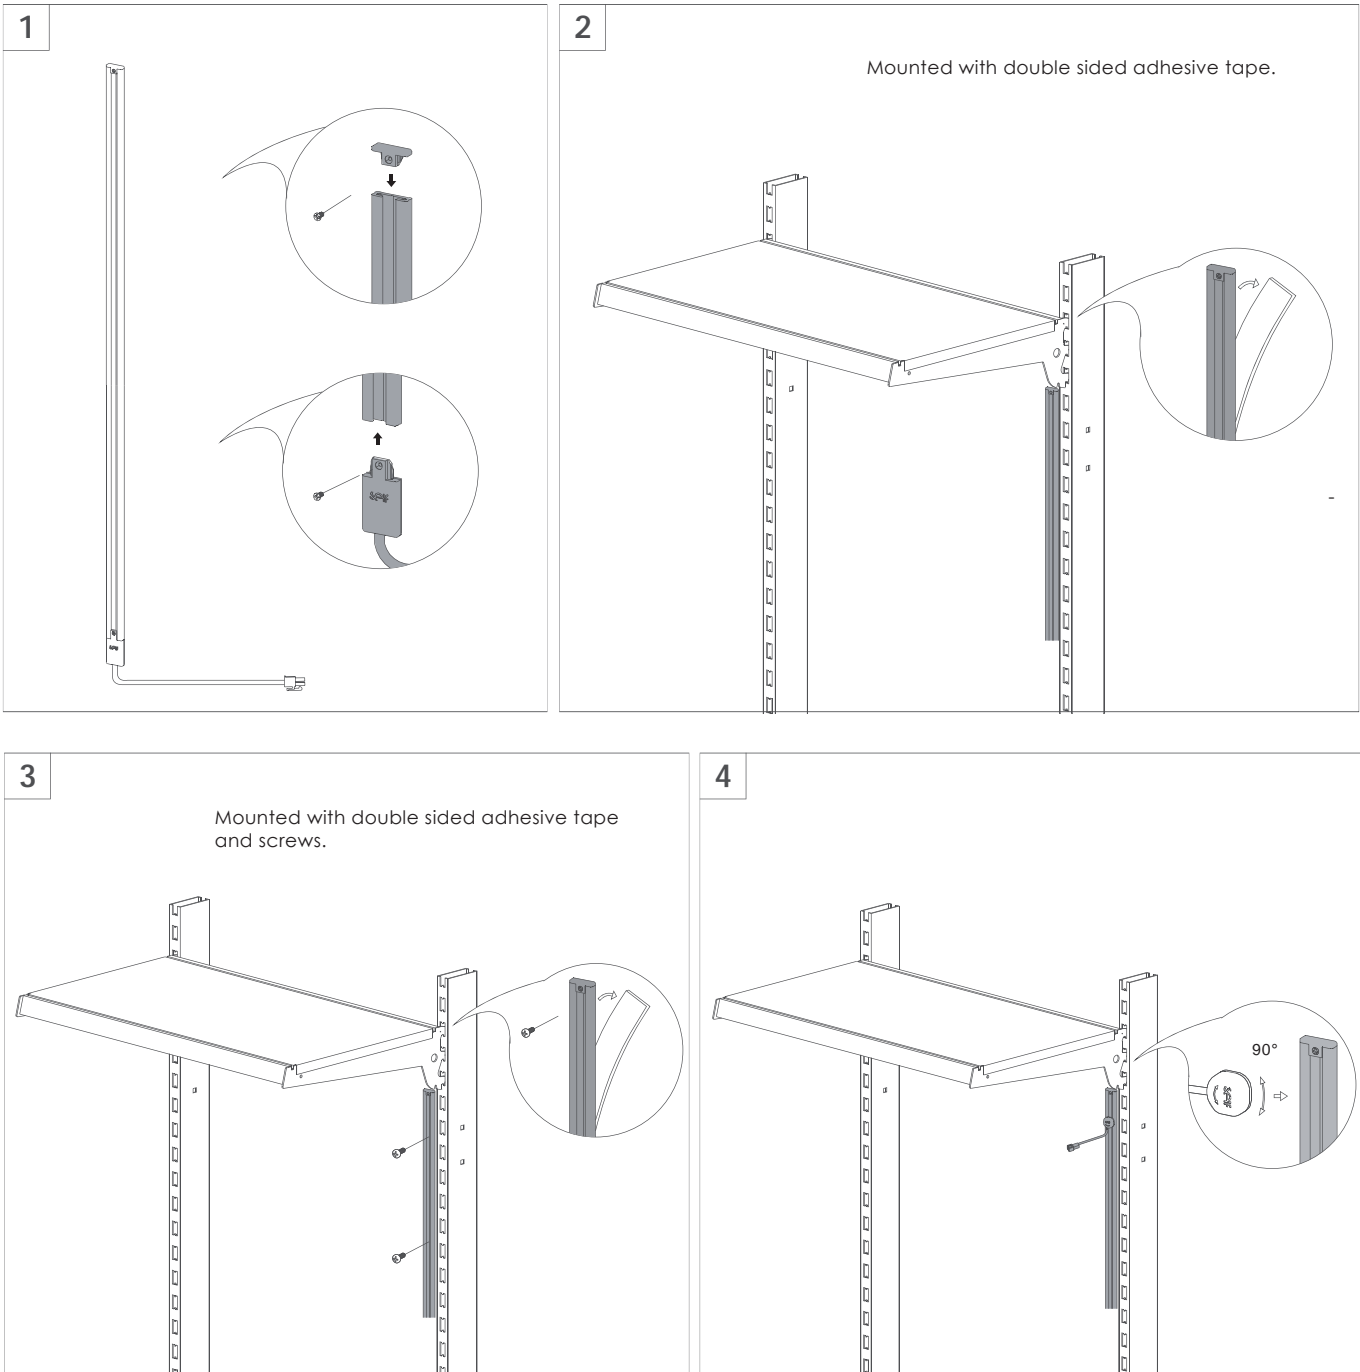
**Accessories**

Catalog No.	Description	Length (inch)
MNTK-72	 The track of MNTK	68.9"
MNTK-MNVS-2	 The adaptor of MINI track, with 2" output cable + HAA250G socket Max output 2A.	2"
IC-MNTK-59	 Input cable of MINI track, with end cap 59" length + PDL plug (must be between the MINI track and splitter)	59"
SC-MNTK-2	 Soft connector	2"
NA159-7524LA-6V6	 Model: SLT75-24VL-2A Matching driver, max. 75W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 6-way splitter JB-6-4 + 6" cable.	

# Power Track Management

## MNTK

### Installation



# Power Track Management MNTK

Installation

