


Showcase Lighting
SPARKLE



Showcase Lighting

SPARKLE



- Plug & play (External power supply)
- Anti-glare design
- Delicate and exquisite shape
- Elegant appearance
- Bright and consistent illuminance for display area
- Customized design height up to 18"
- Customized design length up to 46"
- Ra>90, R9>50
- Lifetime:50,000hrs (ta=95°F, 35°C)
- Ta:-4°F~95°F (-20°C~35°C)
- 3.5w/ft,245lm/ft
- Material:Aluminum alloy
- Other color temp available



Dimensions: (inches/mm)



How to order using our catalog numbers
Example: SPARKLE-171140KBN


Series	Length	Height	CCT (K)	Finish	Installation
SPARKLE	17-16.5"(420mm) 46-45.5"(1156mm)	11 - 10.6"(270mm)	40K - 4000K 50K - 5000K	B - Black	N - Nut

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm	40W (NA159-4024LA-12A6)
SPARKLE-171140KBN	SPARKLE-L28-24V	24	92	5	350	7pcs ^[1]
SPARKLE-171150KBN						
SPARKLE-461140KBN	SPARKLE-L84-24V	24	92	14	980	2pcs ^[1]
SPARKLE-461150KBN						

* Included: 1pc LED fixture, 2pcs Nuts, 2pcs Washers.
[1]: Max. Pcs Per UL Listed LED Power Supply.

Photometrics




Showcase Lighting


SPARKLE

Photometrics

unit:fc

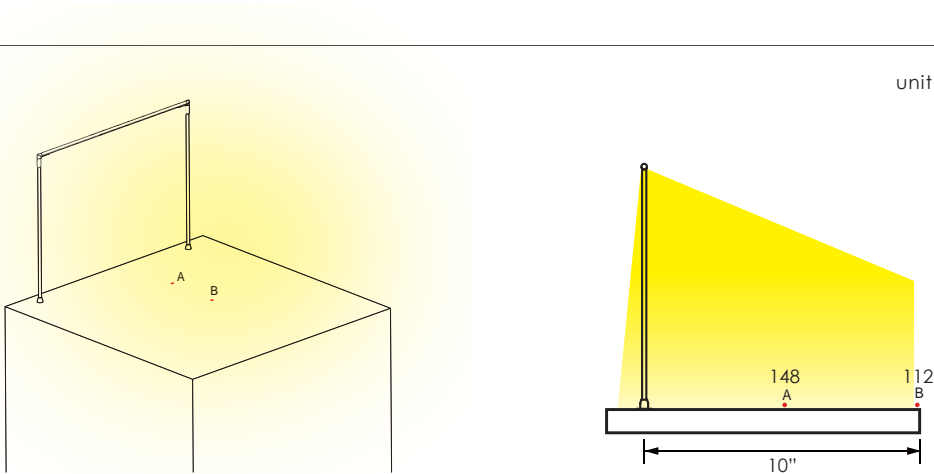

Accessories

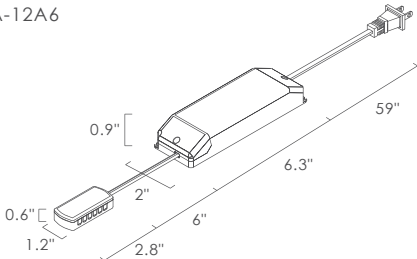Catalog No.	Description	Length (inch)
NA159-4024LA-12A6	 <p>Model: SLT40-24VL-UN-A Matching driver, max. 40W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 12-way splitter JB-12A + 6" cable.</p>	

Showcase Lighting SPARKLE

Installation

