

Back Lighting
PANEL




Back Lighting PANEL



- Plug & play (External power supply)
- Super thin design
- Uniform illumination
- Easy installation
- Edge-lit illumination
- Customized design sizes up to 4' x 3'
- Light diffuser design for smooth illuminance
- Lifetime: 50,000 hours (ta= 95°F, 35 °C)
- Ta: - 4°F~95°F (- 20 °C~35 °C)
- Driver and cable are provided in different spec



Dimensions: (inches/mm)

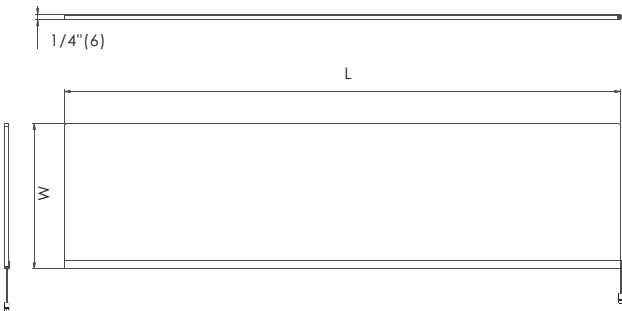

How to order using our catalog numbers
Example: PANEL-124640K

Series	Length	CCT (K)	Finish	Installation
PANEL	1246 - 11.9"×46" (300×1170)	40K - 4000K 65K - 6500K	[blank] - Silver	[blank] - Surface Mounting

Specifications


Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm	40W (NA159-4024LA-12A6)
PANEL-124640K	PANEL-S144-24V	24	85	20	1400	1pc ^[1]
PANEL-124665K						

* included: 1pc LED fixture.
[1]: Max. pcs Per UL Listed LED Power Supply.

Accessories

Catalog No.	Description	Length (inch)
-------------	-------------	---------------

NA159-4024LA-12A6

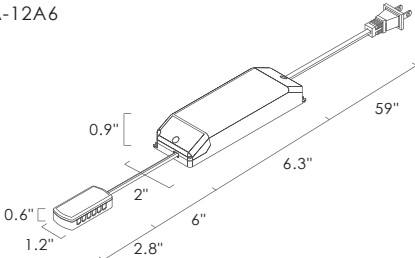

Model: SLT40-24VL-UN-A
Matching driver, max. 40W.
Input: 100-120VAC NA plug 1 + 59" cable.
Output: 24VDC 12-way splitter JB-12A + 6" cable.