

SLPU-2P1U1C-BK



ELECTRICAL

2 × TR AC Receptacle, rated 15A, 125Vac
1x USB-A (Rated 5Vdc, 3.1A)
1x USB-TYPE C port
(Rated 5Vdc, 3.1A 9Vdc, 2A / 12Vdc, 1.5A)
Cord 10' 14-gauge AC cord & plug (flat plug standard)



MECHANICAL

Recessed mounting



CERTIFICATION

FCC compliant and UL Listed




WARRANTY

5 Years




Dimension(inches/mm)

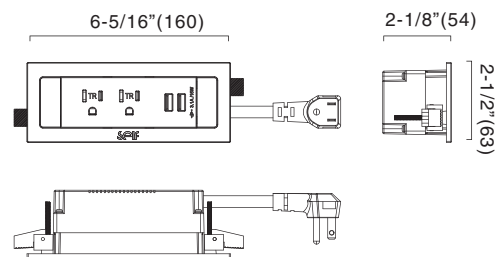

Installation

Cut hole size:
5.94"×2.09"(151mm×53mm)

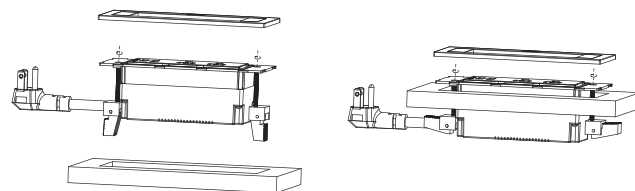

SLPU-2P1U1C-WH



ELECTRICAL

2 × TR AC Receptacle, rated 15A, 125Vac
1x USB-A (Rated 5Vdc, 3.1A)
1x USB-TYPE C port
(Rated 5Vdc, 3.1A 9Vdc, 2A / 12Vdc, 1.5A)
Cord 10' 14-gauge AC cord & plug (flat plug standard)



MECHANICAL

Recessed mounting



CERTIFICATION

FCC compliant and UL Listed




WARRANTY

5 Years




Dimension(inches/mm)

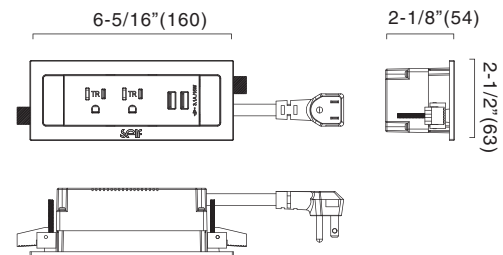

Installation

Cut hole size:
5.94"×2.09"(151mm×53mm)

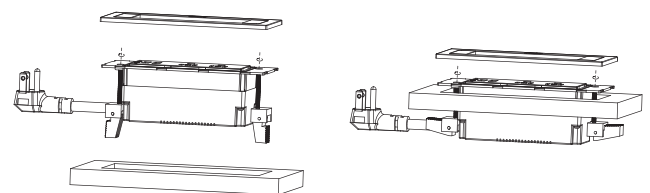

SLPU-2P1U1C-NI



ELECTRICAL

2 × TR AC Receptacle, rated 15A, 125Vac
1x USB-A (Rated 5Vdc, 3.1A)
1x USB-TYPE C port
(Rated 5Vdc, 3.1A 9Vdc, 2A / 12Vdc, 1.5A)
Cord 10' 14-gauge AC cord & plug (flat plug standard)



MECHANICAL

Recessed mounting



CERTIFICATION

FCC compliant and UL Listed




WARRANTY

5 Years



Dimension(inches/mm)

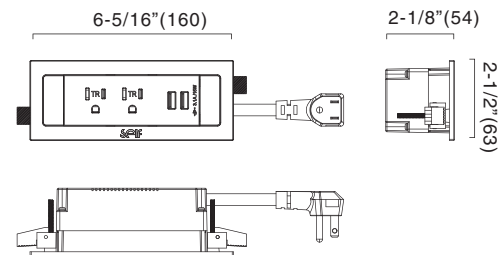

Installation

Cut hole size:
5.94"×2.09"(151mm×53mm)

