

# Grazing Lighting

## CREST NARROW



# Grazing Lighting


## CREST NARROW



- Quick connection
- Dimmable, 1-10V dimming to 10%-100%
- Dark spot free at the linking point
- Linkable, max. linkable length: 120' @ 120VAC, 200' @ 277VAC
- Lockable, precision aiming adjustment:  $\pm 70^\circ$  vertical rotation
- Lifetime: 50,000hrs ( $t_a=95^\circ\text{F}$ ,  $35^\circ\text{C}$ )
- $T_a: -4^\circ\text{F} \sim 95^\circ\text{F}$  ( $-20^\circ\text{C} \sim 35^\circ\text{C}$ )
- 5W/ft, 450lm/ft
- Material: Aluminum alloy
- Other color temp available.



Dimensions: inches, (mm)

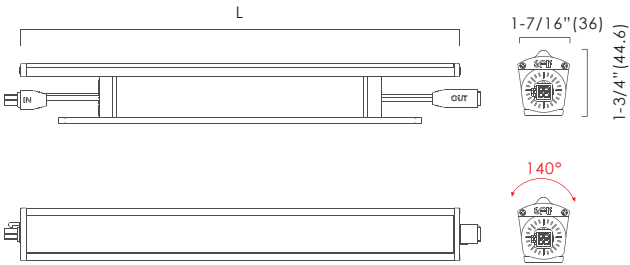

How to order using our catalog numbers  
Example: CREST-1227K40SS

Series	Length	CCT (K)	Beam Angle	Finish	Installation
CREST	12 - 11.8" (300mm)	27K - 2700K	40 - 40°	S - Silver	S - Screw Mounting
	48 - 47.2" (1200mm)	30K - 3000K			
		35K - 3500K			
		40K - 4000K			

### Specifications


Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm
CREST-1227K40SS	CREST NARROW-L12-277V	120-277	90	5	450
CREST-1230K40SS					
CREST-1235K40SS					
CREST-1240K40SS					
CREST-4827K40SS	CREST NARROW-L48-277V	120-277	90	20	1800
CREST-4830K40SS					
CREST-4835K40SS					
CREST-4840K40SS					

\* Included: 1pc LED fixture, 2pcs screws.


# Grazing Lighting

## CREST NARROW



### Photometrics






### Wiring Diagram

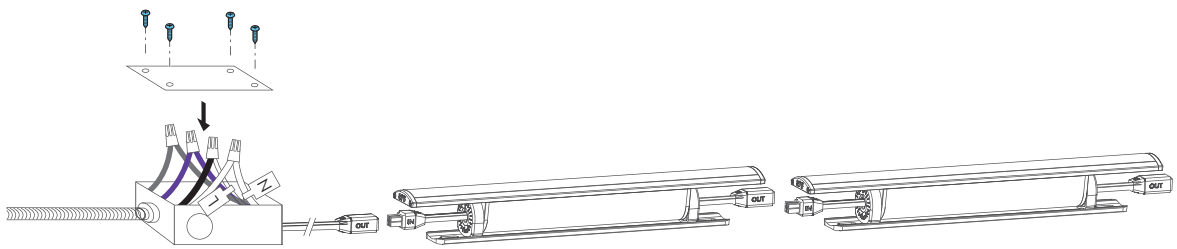

### Accessories

Catalog No.	Description	Length (inch)
IC-CT-59	 Input cable	59"
IC-CT-120	 Input cable	120"

### Accessories(optional)


Catalog No.	Description	Length (inch)
SC-CT-12	 Soft connector	12"
SC-CT-59	 Soft connector	59"
TK-CT-79	 Track including 3pcs screws	79"

# Grazing Lighting


## CREST NARROW

### Installation

#### Screw installation

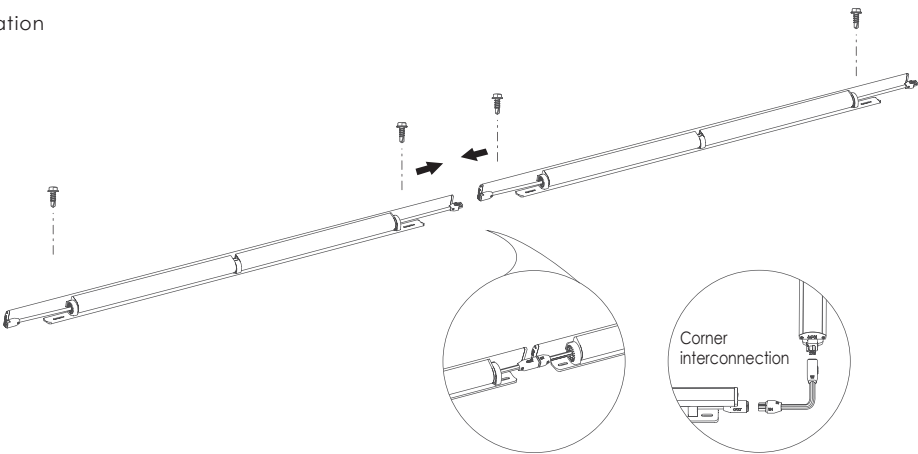

#### Track installation

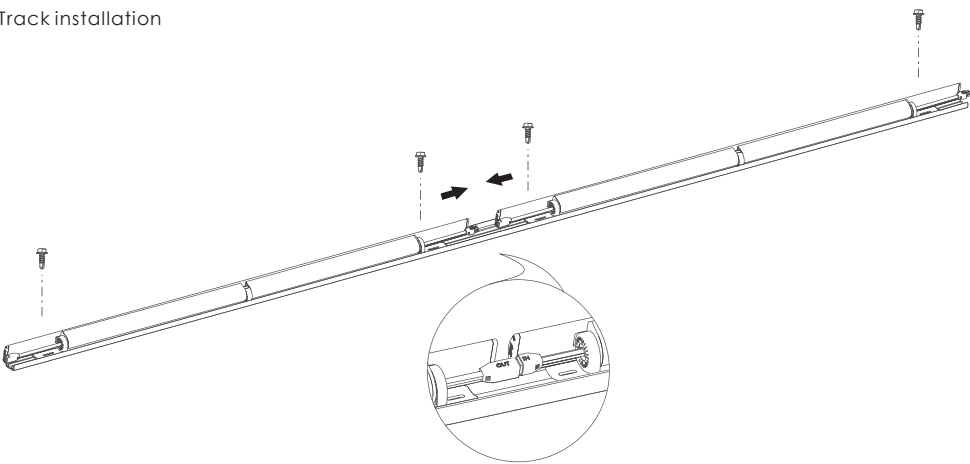

### Installation

#### Application

