

Outdoor Cove Lighting **CROWN NARROW**



- **Narrow beam angle**
- **0/1-10V dimmable**
- **±85°vertical rotation**
- **Waterproof IP66**

Outdoor Cove Lighting

CROWN NARROW



- Quick connection
- Narrow beam angle
- Dimmable, 1-10V dimming to 10%-100%
- Linkable, max.linkable length: 72' @120VAC, 156' @277VAC
- Lockable, precision aiming adjustment: $\pm 85^\circ$ vertical rotation
- IP rating: IP66 (for wet locations)
- Lifetime: 50,000hrs ($t_a=95^\circ\text{F}$, 35°C)
- T_a : $-13^\circ\text{F} \sim 122^\circ\text{F}$ ($-25^\circ\text{C} \sim 50^\circ\text{C}$)
- 10W/ft, 1000lm/ft
- Material: Aluminum alloy
- Other color temp available



Dimensions: inches, (mm)



How to order using our catalog numbers
Example: CROWN NARROW-1230K3060SS


Series	Length	CCT (K)	Beam Angle	Finish	Installation
CROWN NARROW	12 - 11.8" (300mm)	30K - 3000K	3060 - $30^\circ \times 60^\circ$	S - Silver	S - Screw Mounting
	47 - 47" (1200mm)	35K - 3500K			
	70 - 70" (1778mm)	40K - 4000K			

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm
CROWN NARROW-1230K3060SS	CROWN NARROW-L12-277V	120-277	90	10	1000
CROWN NARROW-1235K3060SS					
CROWN NARROW-1240K3060SS					
CROWN NARROW-4730K3060SS	CROWN NARROW-L45-277V	120-277	90	40	4000
CROWN NARROW-4735K3060SS					
CROWN NARROW-4740K3060SS					
CROWN NARROW-7030K3060SS	CROWN NARROW-L72-277V	120-277	90	60	6000
CROWN NARROW-7035K3060SS					
CROWN NARROW-7040K3060SS					

* 1pc LED fixture, 2pcs screws.


Photometrics

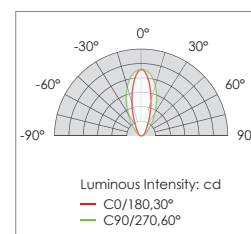

Outdoor Cove Lighting

CROWN/CROWN NARROW

Wiring Diagram

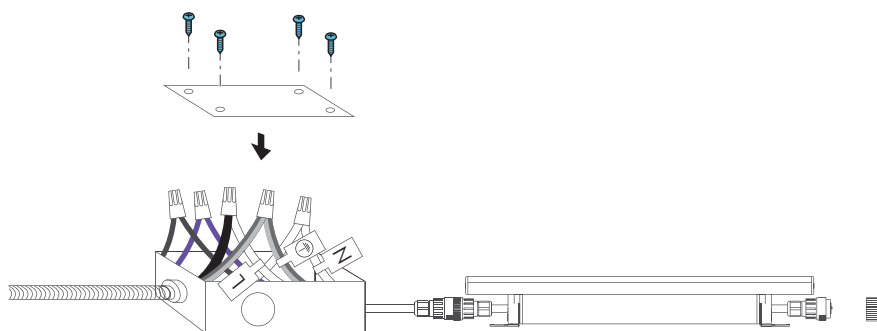


AC connection :

Black: " L "

White: " N "

Yellow/green: "  "






Dimming connection :




Violet: " + " _____

Gray: " - " _____

Accessories

Catalog No.	Description	Length (inch)
IC-CROWN-59	 Input cable	59"
IC-CROWN-84	 Input cable	84"
IC-CROWN-180	 Input cable	180"


Accessories(optional)

Catalog No.	Description	Length (inch)
SC-CROWN-12	 Soft connector	12"
SC-CROWN-48	 Soft connector	48"
SC-CROWN-96	 Soft connector	96"

Outdoor Cove Lighting

CROWN/CROWN NARROW

Installation

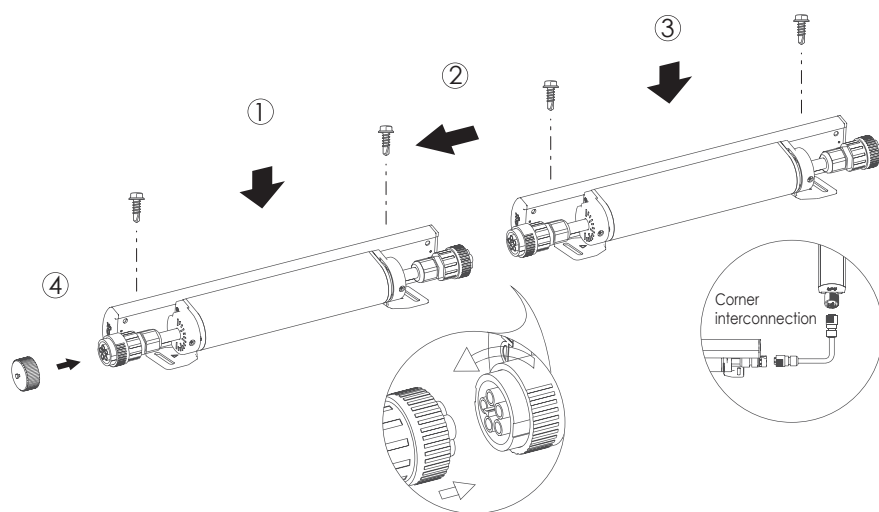

Application

