

Night light


GLIM



- Delay times adjusted by switch
- Recessed for easy installation
- Human-body detection
- Integrated with daylight detection sensor
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta:-13°F~95°F (-25°C~35°C)
- Material: PC
- Other color temp available



Dimensions: inches, (mm)

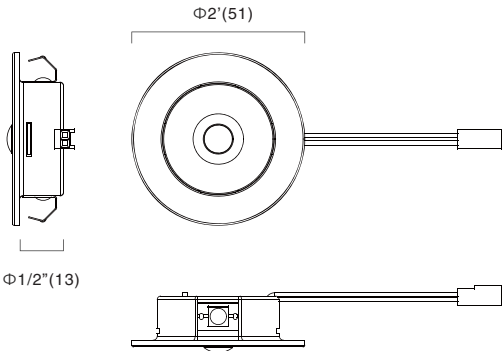

How to order using our catalog numbers
Example: GLIM-30K


Series	CCT (K)	Beam Angle	Finish	Installation
GLIM	27K - 2700K 30K - 3000K	[blank] - 110°	[blank] - Black W - White	[blank] - Recessed mounting

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm	40W (NA159-4024LA-12A6)
GLIM-27K	GLIM-R8-24V	24	85	0.3W	10	12 pcs
GLIM-30K						


* Included: 1pc LED fixture

Photometrics




Night Light

GLIM

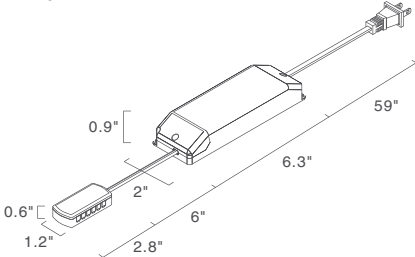
Accessories	Catalog No.	Description	Length (inch)
	NA159-4024LA-12A6	 <p>Model: SLT40-24VL-UN-A Matching driver, max. 40W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 12-way splitter JB-12A + 6" cable.</p>	

Installation

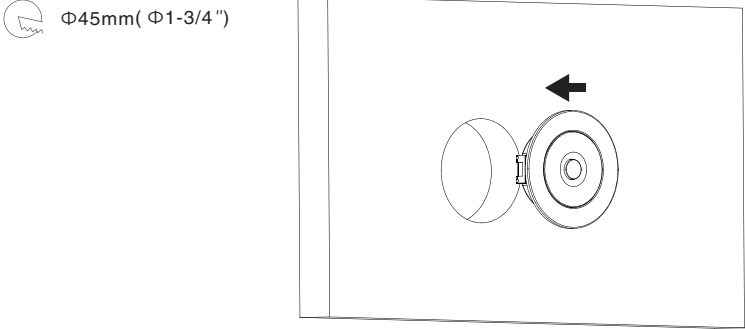



Function

Detection range:




60°





Delay time:
 15s, 35s, 150s



Delay times

Note: When the sensor detects ambient light illumination >10fc, the sensor controller shuts off the auto-detect mode.

When the sensor detects ambient light illumination <10fc, the sensor controller starts auto-detect mode.