


POWER TRACK MANAGEMENT

Features


- Track system for low voltage, max 12V, 5A or 24V, 4A
- For adapter, max. output current 2A
- Easy to adjust shelf position by moving shelf with shelf plug
- Finish: natural aluminum (track), white(others accessories)
- Custom lengths or finishes available by special order
- Ta:-13°F-122°F(-25°C-50°C)



SPTK-95




Dimensions: (inches/mm)




The track of SPTK

Length(inch)	94.5"
--------------	-------

ADP-SPTK



Dimensions: (inches/mm)

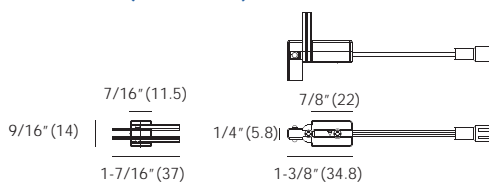


The adaptor of SPTK


with 2" output cable
+ HAA250G socket.

Max output 2A.

IC-SPTK-59




Dimensions: (inches/mm)

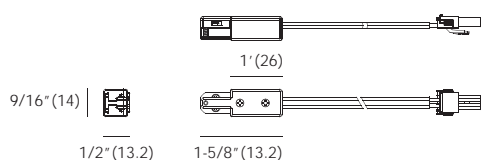


Input cable of SPTK

with 59" cable + PDL plug.

ARM-SPTK




Dimensions: (inches/mm)

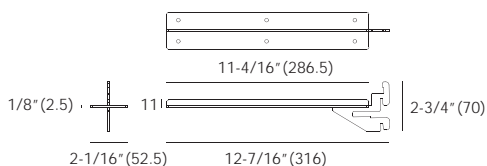


Shelf bracket of SPTK

-

TC-SPTK



Dimensions: (inches/mm)



Top cap of SPTK