

LED Power Supply

CV Version



Features


- UL 8750 class 2 output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Efficiency≥83% (AC120V, full load)
- Warranty: 5 years

Standards

UL1310
CSA C22.2 NO. 250.13-12
UL8750
CSA C22.2 NO. 223-M91
EN 61347-1 EN61347-2-13
EN55015 EN61547
EN61000-3-2 EN61000-3-3



Dimensions: (inches/mm)

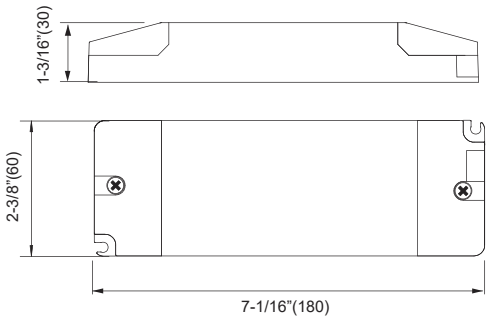

Characteristics

Rated input voltage: AC100-240V 50/60Hz (power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	λ	t_a	L x W x H	Approval
SLT75-24VL-2	DC24V	0-75W	0.95	-4-122°F (-20-50°C)	7-1/16"x2-3/8"x1-3/16" (180x60x30mm)	