





- Applicable for retrofit and new mounting with standard track system.
- Tool-free mechanical and electrical installation in 10 seconds.
- Super high light efficiency, up to 160 lm/W
- Battery backup available
- Maximum power capacity of the standard track: 1920VA(@120Vac), 4432VA(@277Vac)
- Lifetime: 50,000hrs (L80, ta=95°F, 35°C)
- Ta: -4°F~95°F (-20 C ~35°C)
- Material: Aluminum alloy





APPLICATION



Dimensions: inches, (mm)

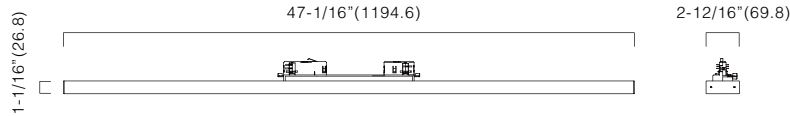


Photometrics

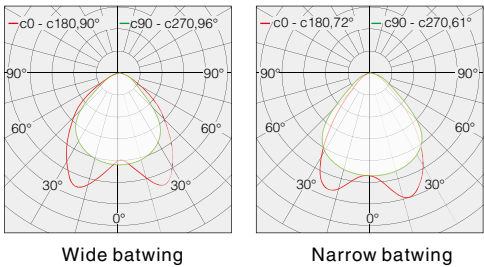

Optical Lens

How to order using our catalog numbers

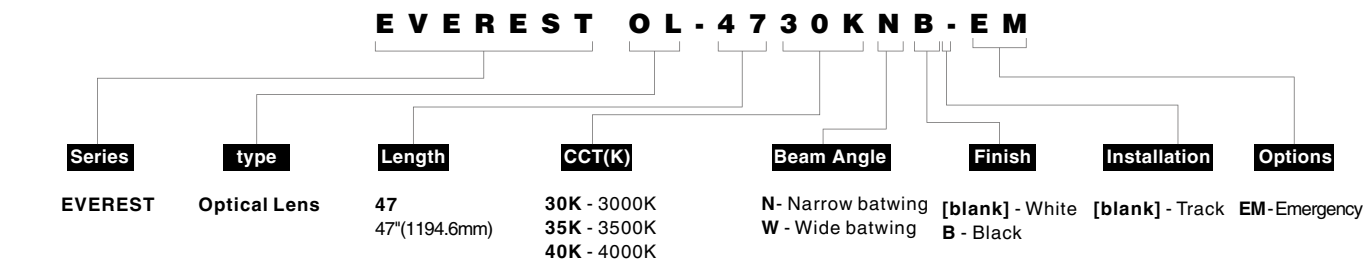

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (lm)
EVEREST OL-4730KN	EVEREST MO-L1200-277V-DFL	120-277	83	40	5800
EVEREST OL-4735KN					5880
EVEREST OL-4740KN					6000
EVEREST OL-4730KW					6150
EVEREST OL-4735KW					6280
EVEREST OL-4740KW					6400
EVEREST OL-4730KNB					5800
EVEREST OL-4735KNB					5880
EVEREST OL-4740KNB					6000
EVEREST OL-4730KWB					6150
EVEREST OL-4735KWB					6280
EVEREST OL-4740KWB					6400
EVEREST OL-4730KN-EM	EVEREST MO-L1200-277V-DFL-EM	120-277	83	40	5800
EVEREST OL-4735KN-EM					5880
EVEREST OL-4740KN-EM					6000
EVEREST OL-4730KW-EM					6150
EVEREST OL-4735KW-EM					6280
EVEREST OL-4740KW-EM					6400
EVEREST OL-4730KNB-EM					5800
EVEREST OL-4735KNB-EM					5880
EVEREST OL-4740KNB-EM					6000
EVEREST OL-4730KWB-EM					6150
EVEREST OL-4735KWB-EM					6280
EVEREST OL-4740KWB-EM					6400






- Applicable for retrofit and new mounting with standard track system.
- Tool-free mechanical and electrical installation in 10 seconds.
- Super high light efficiency, up to 140 lm/W
- Battery backup available
- Maximum power capacity of the standard track: 1920VA(@120Vac), 4432VA(@277Vac)
- Lifetime: 50,000hrs (L80, ta=95°F, 35°C)
- Ta: -4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy




APPLICATION




Wide beam angle



Pixel free




Track mount




3000K
3500K
4000K



50,000hrs



Other CCT Available




IP20





DALI



Dimensions: inches, (mm)

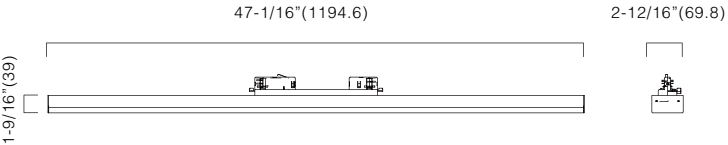

Photometrics



Frosted Cover

How to order using our catalog numbers

EVEREST FC - 4730KB - EM

Series

EVEREST

type

Frosted Cover

Length

47
47"(1194.6mm)

CCT(K)

30K - 3000K
35K - 3500K
40K - 4000K

Beam Angle

[Blank] - 120°

Finish

[blank] - White
B - Black

Installation

[blank] - Track

Options

EM - Emergency

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (lm)
EVEREST FC-4730K	EVEREST MO-L1200-277V-DM	120-277	83	40	5382
EVEREST FC-4735K					5488
EVEREST FC-4740K					5600
EVEREST FC-4730KB					5382
EVEREST FC-4735KB					5488
EVEREST FC-4740KB	EVEREST MO-L1200-277V-DM-EM	120-277	83	40	5600
EVEREST FC-4730K-EM					5382
EVEREST FC-4735K-EM					5488
EVEREST FC-4740K-EM					5600
EVEREST FC-4730KB-EM					5382
EVEREST FC-4735KB-EM					5488
EVEREST FC-4740KB-EM					5600


EVEREST-FC Ceiling Lighting 02



- Applicable for retrofit and new mounting with standard track system.
- Tool-free mechanical and electrical installation in 10 seconds.
- Super high light efficiency, up to 155 lm/W
- Battery backup available
- Maximum power capacity of the standard track: 1920W(@120Vac), 4432W(@277Vac)
- Lifetime: 50,000hrs (L80, ta=95°F, 35°C)
- Ta: -4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy




APPLICATION



Dark Light




Anti-glare




Track mount



50,000hrs




Other CCT Available





IP20



DALI




Dimensions: inches, (mm)

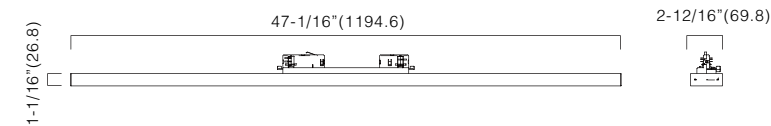

Darklight

Photometrics



How to order using our catalog numbers

Series

EVEREST

type

Dark Light

Length

47
47"(1194.6mm)

CCT(K)

30K - 3000K
35K - 3500K
40K - 4000K

Beam Angle

[Blank] - 70°

Finish

[blank] - White
B - Black

Installation

[blank] - Track

Options

EM - Emergency

EVEREST

DL

-

47

30K

B

-

EM

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (lm)
EVEREST DL-4730K	EVEREST LO-L1200-277V-DR	120-277	83	30	4469
EVEREST DL-4735K					4557
EVEREST DL-4740K					4650
EVEREST DL-4730KB					4469
EVEREST DL-4735KB					4557
EVEREST DL-4740KB					4650
EVEREST DL-4730K-EM	EVEREST LO-L1200-277V-DR-EM	120-277	83	30	4469
EVEREST DL-4735K-EM					4557
EVEREST DL-4740K-EM					4650
EVEREST DL-4730KB-EM					4469
EVEREST DL-4735KB-EM					4557
EVEREST DL-4740KB-EM					4650

Accessories

Catalog No.	Description	Image
TK-6C-4-B TK-6C-8-B 6 Conductors track	6 Conductors track, black 4ft 6 Conductors track, black 8ft	
TK-6C-4-W TK-6C-8-W 6 Conductors track	6 Conductors track, white 4ft 6 Conductors track, white 8ft	
EFUS-6C-R-B EFUS-6C-L-B End feed	End feed, black right End feed, black left	
EFUS-6C-R-W EFUS-6C-L-W End feed	End feed, white right End feed, white left	
SF-CON-6C-B Straight feed connector	Straight feed connector, black	
SF-CON-6C-W Straight feed connector	Straight feed connector, white	

Accessories

Catalog No.	Description	Image
F-CON-6C-B Flexible connector	Flexible connector black	
F-CON-6C-W Flexible connector	Flexible connector white	
L-CON-R-6C-B L-CON-L-6C-B L-connector	L-connector, right black L-connector, left black	
L-CON-R-6C-W L-CON-L-6C-W L-connector	L-connector, right white L-connector, left white	
T-CON-RO-6C-B T-CON-LI-6C-B T-CON-RI-6C-B T-CON-LO-6C-B T-connector	T-con right outside, black T-con left inside, black T-con right inside, black T-con left outside, black	
T-CON-RO-6C-W T-CON-LI-6C-W T-CON-RI-6C-W T-CON-LO-6C-W T-connector	T-con right outside, white T-con left inside, white T-con right inside, white T-con left outside, white	
X-CON-6C-B X-connector	X-connector, black	
X-CON-6C-W X-connector	X-connector, white	
DE-6C-B Dead End	Dead End, black	
DE-6C-W Dead End	Dead End, white	
AC10-6C Aircraft monting clip	Aircraft cable 10ft	
SMC-6C Monting clip	Surface mounting clip	
TCC-6C-B Track connection clamp	Track connection clamp, black	
TCC-6C-W Track connection clamp	Track connection clamp, white	