






01 MINI TELEP Ceiling Lighting




- Anti-glare design
- Compact profile
- Compatible with 3 circuits track
- Available with swivel heads, allows swiveling up to 90 ° and rotation of 350°
- Lifetime: 50,000hrs (L80, ta=95°F, 35°C)
- Ta:-4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy

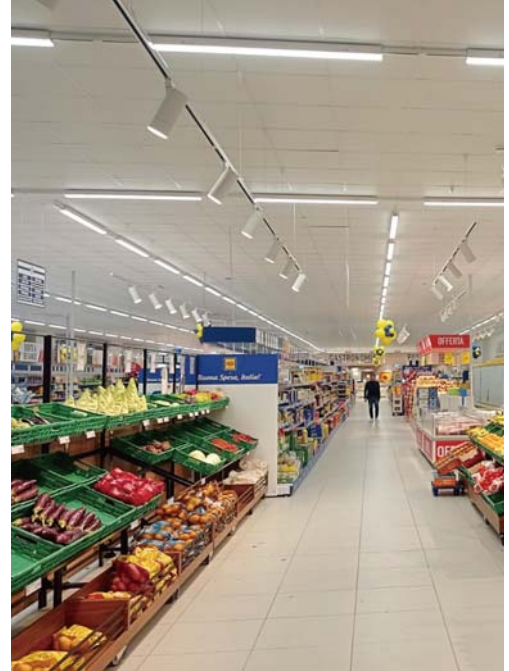


APPLICATION



Dimensions: inches, (mm)

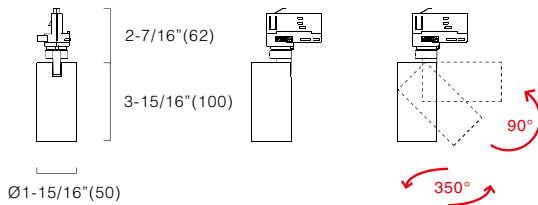


Photometrics

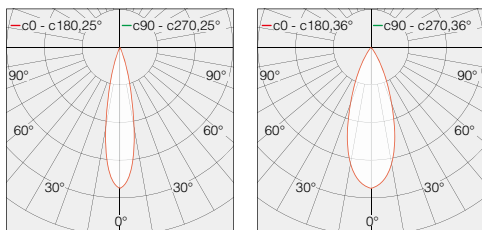

01 MINI TELEP Ceiling Lighting

How to order using our catalog numbers

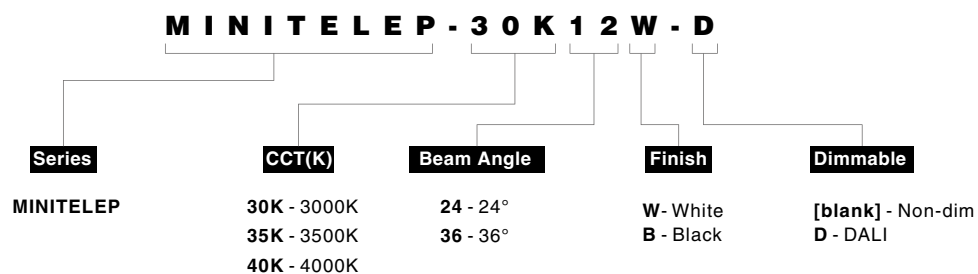

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	CCT	Luminous flux (lm)
MINITELEP-30K24W	MINITELEP-R1-277V	120-277	92	14	24°	3000K	1324
MINITELEP-35K24W						3500K	1383
MINITELEP-40K24W						4000K	1420
MINITELEP-30K36W				14	36°	3000K	1400
MINITELEP-35K36W						3500K	1470
MINITELEP-40K36W						4000K	1498
MINITELEP-30K24B				14	24°	3000K	1324
MINITELEP-35K24B						3500K	1383
MINITELEP-40K24B						4000K	1420
MINITELEP-30K36B				14	36°	3000K	1400
MINITELEP-35K36B						3500K	1470
MINITELEP-40K36B						4000K	1498
MINITELEP-30K24W-D	MINITELEP-R1-277V-D	120-277	92	14	24°	3000K	1324
MINITELEP-35K24W-D						3500K	1383
MINITELEP-40K24W-D						4000K	1420
MINITELEP-30K36W-D				14	36°	3000K	1400
MINITELEP-35K36W-D						3500K	1470
MINITELEP-40K36W-D						4000K	1498
MINITELEP-30K24B-D				14	24°	3000K	1324
MINITELEP-35K24B-D						3500K	1383
MINITELEP-40K24B-D						4000K	1420
MINITELEP-30K36B-D				14	36°	3000K	1400
MINITELEP-35K36B-D						3500K	1470
MINITELEP-40K36B-D						4000K	1498