

FENCE Linear Lighting



# FENCE Linear Lighting

- Wallwash optic
- Special design for shelf
- Lifetime: 50,000hrs (ta=95°F, 35°C).
- Ta: -4°F~95°F (-20°C~35°C).
- Material: Aluminum alloy




## APPLICATION




 wide beam angle	 surface mount	 3000K 3500K 4000K	 50,000hrs	Other CCT Available	IP20

## Dimensions: inches, (mm)

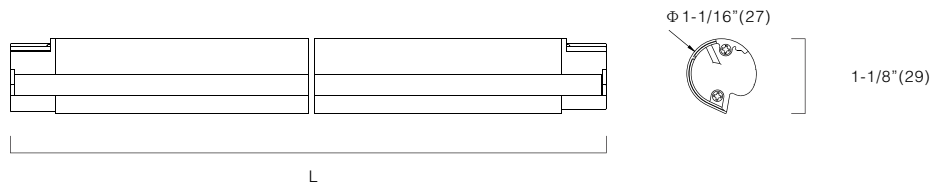


## Photometrics



# FENCE Linear Lighting

## How to order using our catalog numbers

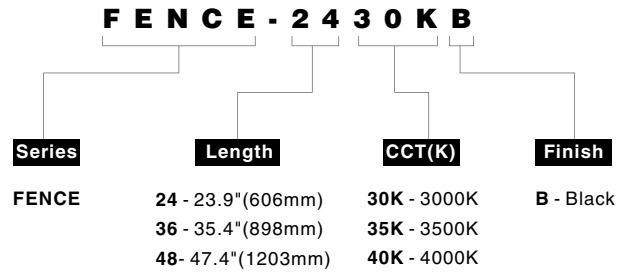

## Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Length	Beam angle	CCT	Luminous flux (lm)
FENCE-2430KB							3000K	1050
FENCE-2435KB	FENCE-L625-24V	24	92	9	23.9"(606mm)	wallwash	3500K	1096
FENCE-2440KB							4000K	1125
FENCE-3630KB							3000K	1574
FENCE-3635KB	FENCE-L900-24V	24	92	13.5	35.4"(898mm)	wallwash	3500K	1644
FENCE-3640KB							4000K	1688
FENCE-4830KB							3000K	2099
FENCE-4835KB	FENCE-L1225-24V	24	92	18	47.4"(1203mm)	wallwash	3500K	2192
FENCE-4840KB							4000K	2250


\* included: 1pc LED fixture, 2pcs screws, 2pcs mounting clips, 1pc end cap

## Accessories

Catalog No.	Description	Image
<b>LRA-FN-B</b> left+right arms (included)	Left arm with input cable+right arm	
<b>MIDA-FN-B</b> Middle arm	Middle arm with input cable optional	

# FENCE Linear Lighting

## Accessories

Catalog No.	Description	Image
<b>NA159-4024LA-6V6</b> LED power supply	Model: SLT40-24VL-UN-A Matching driver, max. 40W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 6-way splitter JB-6-4 + 6" cable.	

## Installation

