

- 0/1-10V dimmable
- Waterproof IP65

- Even light distribution
- Linkable available, max. linkable length:  
72' @120VAC, 156' @277VAC
- Dimmable, 1-10V dimming to 10%-100%
- IP rating: IP65 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F(-25°C~35°C)
- 10.5W/ft, 1575 lm/ft(@4000K)




APPLICATION




Pixel free	Pendant mount	0-10V Dimming	50,000hrs	Other CCT Available	IP65

Dimensions: inches, (mm)

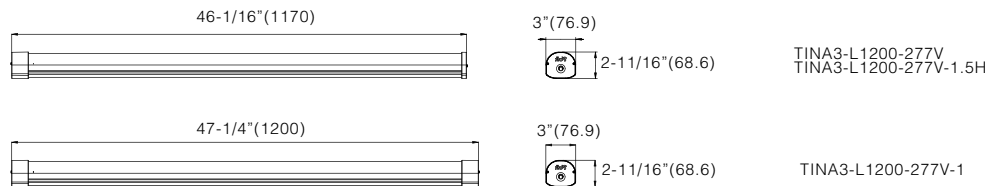


Photometrics



# 49 TINA3 Ceiling Lighting

## How to order using our catalog numbers

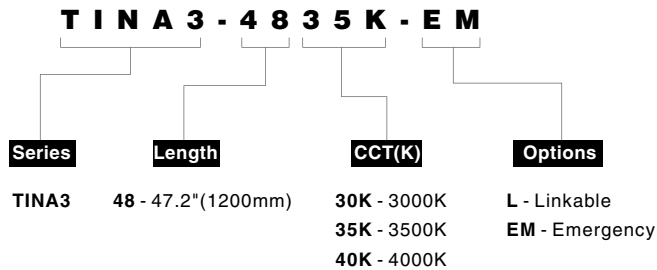

## Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	Length	CCT	Luminous flux (lm)	Max. Linkable
TINA3-4830K	TINA3-L1200-277V	120-277	92	42	120°	47.2"	3000K	5878	Unlinkable
TINA3-4835K							3500K	6136	
TINA3-4840K							4000K	6300	
TINA3-4830K-L	TINA3-L1200-277V-1	120-277	92	42	120°	47.2"	3000K	5878	Linkable
TINA3-4835K-L							3500K	6136	
TINA3-4840K-L							4000K	6300	
TINA3-4830K-EM	TINA3-L1200-277V-1.5H	120-277	92	45	120°	47.2"	3000K	5878	Unlinkable
TINA3-4835K-EM							3500K	6136	
TINA3-4840K-EM							4000K	6300	

\* For TINA3-L1200-277V-1.5H


Battery: Rechargeable LiFePO4 6.4V, min 90-minute emergency illumination  
 Battery charge time: 24hours  
 Emergency output: Constant power 8W, 1400lm  
 Test Button: press<2s(emergency function testing)  
 press>2s(close the emergency function)  
 red LED ON(battery charging)  
 red LED OFF(battery no charging)

## Accessories

Catalog No.	Description	Image
<b>MC-TINA3</b> Mounting package	Mounting Bracket x2 Gasket x2 Expansion screw x2 Screw x2	
<b>AC15-PT</b> Aircraft cable	Aircraft cable without ceiling plate canopy Length: 15ft	


**Installation**

Surface mounting

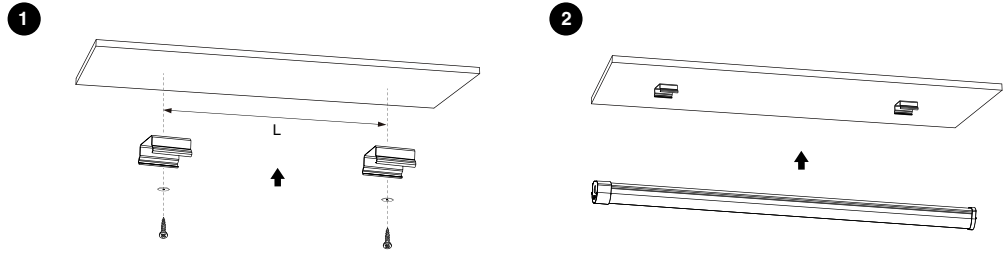


**Installation**

Pendant mounting

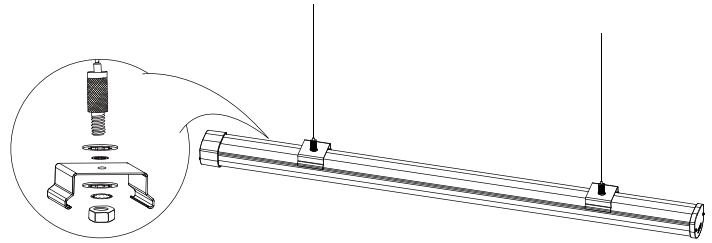

**Wiring**

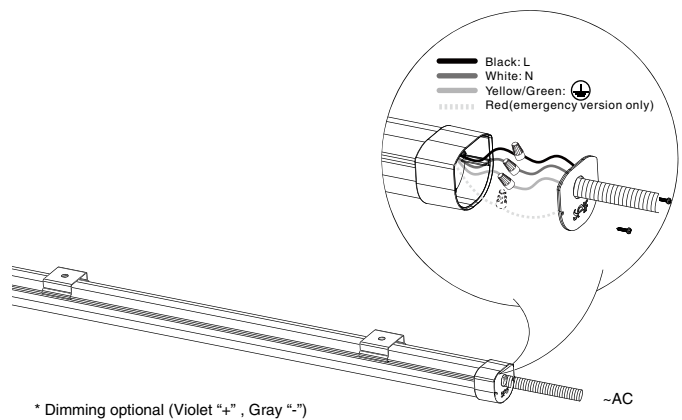

Linkable wiring  
(TINA3-L1200-277V-1)

