


- 0/1-10V dimmable
- $\pm 85^\circ$ vertical rotation
- Waterproof IP66

- Quick connection
- Dimmable, 1-10V dimming to 10%-100%
- Linkable, max. linkable length: 72' @120VAC, 156' @277VAC
- Lockable, precision aiming adjustment: $\pm 85^\circ$ vertical rotation
- IP rating: IP66 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F (-25°C~50°C)
- 10W/ft, 1050lm/ft
- Material: Aluminum alloy
- Other color temp available



APPLICATION

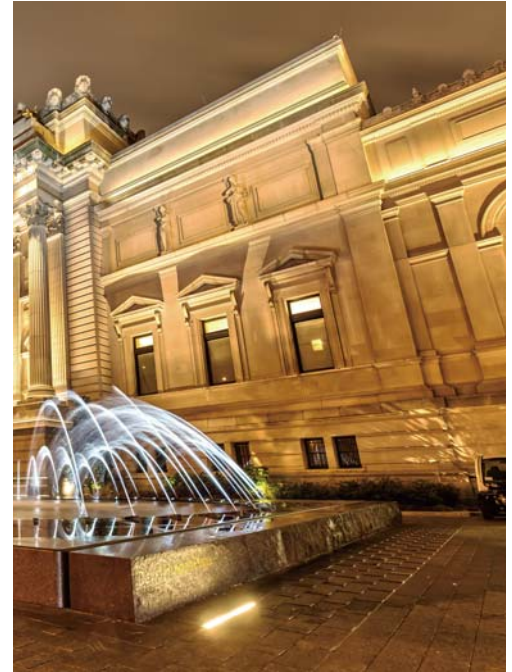


Pixel free	Linkable	Surface mount	1-10V Dimming	3000K 3500K 4000K	50,000hrs	Other CCT Available	IP66

Dimensions: inches, (mm)




Photometrics



61 CROWN Cove Lighting

How to order using our catalog numbers

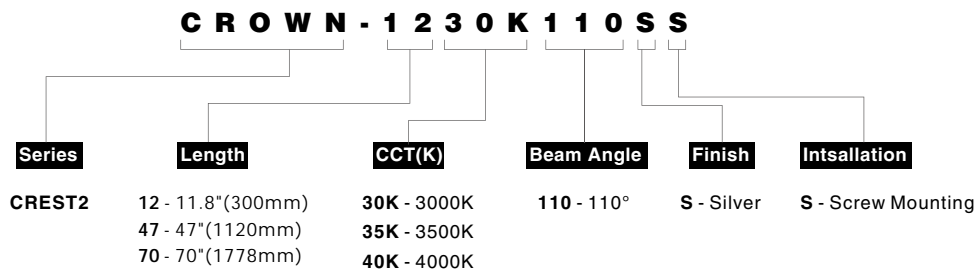







Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	CCT	Luminous flux (lm)
CROWN-1230K110SS						3000K	980
CROWN-1235K110SS	CROWN-L24-277V	120-277	90	10	110°	3500K	1023
CROWN-1240K110SS						4000K	1050
CROWN-4730K110SS						3000K	3919
CROWN-4735K110SS	CROWN-L90-277V	120-277	92	40	110°	3500K	4091
CROWN-4740K110SS						4000K	4200
CROWN-7030K110SS						3000K	5878
CROWN-7035K110SS	CROWN-L144-277V	120-277	92	60	110°	3500K	6136
CROWN-7040K110SS						4000K	6300

* Included: 1 pc LED fixture, 2pcs screws.

Accessories

Catalog No.	Description	Image
IC-CROWN-59 Input cable	Input cable Length 59"	
IC-CROWN-84 Input cable	Input cable Length 84"	
IC-CROWN-180 Input cable	Input cable Length 180"	
SC-CROWN-12 Soft connector optional	Soft connector Length 12"	
SC-CROWN-48 Soft connector optional	Soft connector Length 48"	
SC-CROWN-98 Soft connector optional	Soft connector Length 98"	


Wiring

AC connection :

Black: " L "

White: " N "


Yellow/green: " ⊕ "




Dimming connection :

Violet: " + "

Gray: " - "

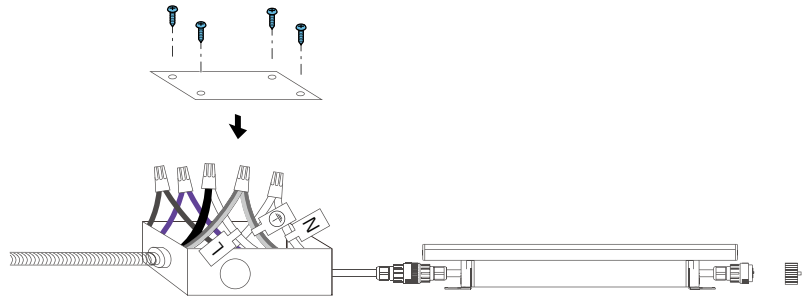

Installation

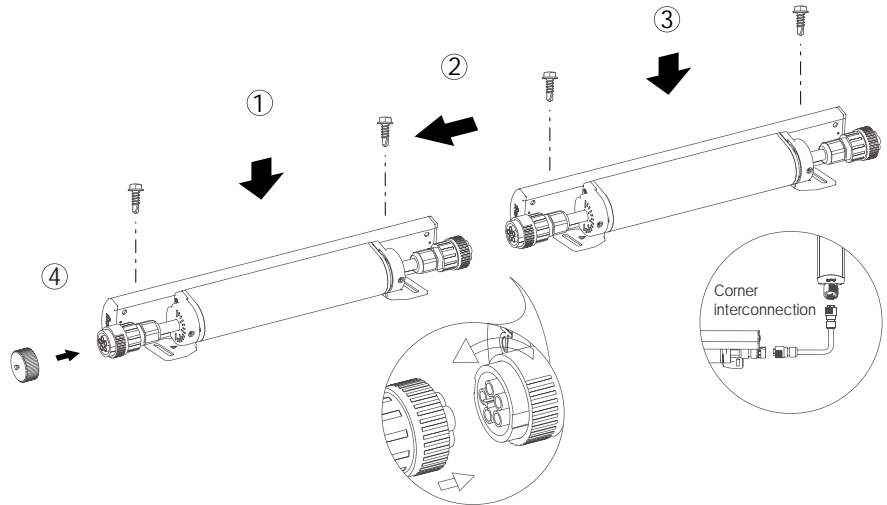

Application

