

- Quick connection
- Dimmable, 1-10V dimming to 10%-100%
- Dark spot free at the linking point
- Linkable, max. linkable length: 120' @120VAC, 200' @ 277VAC
- Lockable, precision aiming adjustment: $\pm 75^\circ$ vertical rotation
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -4°F~95°F (-20°C~35°C)
- 5W/ft, 650lm/ft
- Material: Aluminum alloy




APPLICATION




Linkable	Surface mount	1-10V Dimming	3000K, 3500K, 4000K	50,000hrs	Other CCT Available	IP20

Dimensions: inches, (mm)

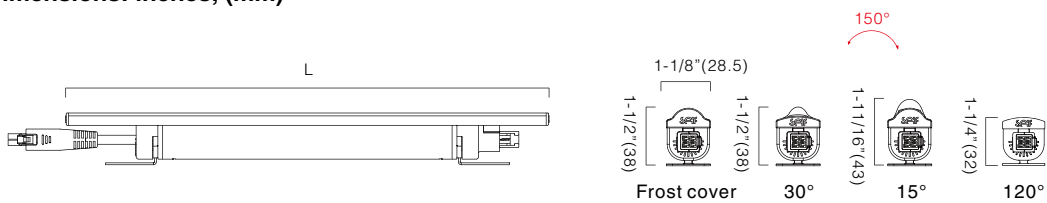


Photometrics

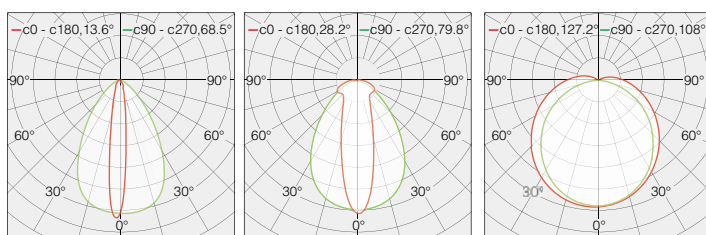



How to order using our catalog numbers

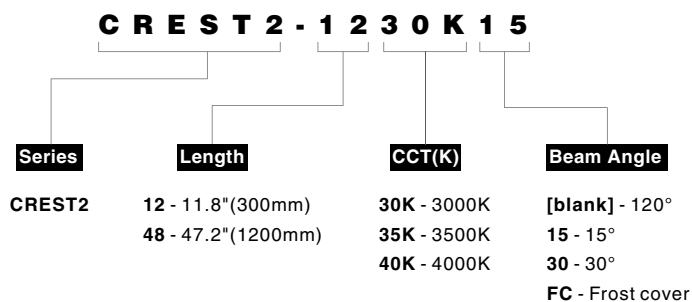



Specifications



Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	CCT	Luminous flux (lm)
CREST2-1230K	CREST2-L300-277V-A	120-277	92	5	120°	3000K	536
CREST2-1235K						3500K	560
CREST2-1240K						4000K	575
CREST2-1230KFC	CREST2-L300-277V-AM	120-277	92	5	Frost cover	3000K	513
CREST2-1235KFC						3500K	536
CREST2-1240KFC						4000K	550
CREST2-1230K15	CREST2-L300-277V-AL	120-277	92	5	15°	3000K	397
CREST2-1235K15						3500K	414
CREST2-1240K15						4000K	425
CREST2-1230K30	CREST2-L1200-277V-AL	120-277	92	20	30°	3000K	513
CREST2-1235K30						3500K	536
CREST2-1240K30						4000K	550
CREST2-4830K	CREST2-L1200-277V-A	120-277	92	20	120°	3000K	2500
CREST2-4835K						3500K	2630
CREST2-4840K						4000K	2700
CREST2-4830KFC	CREST2-L1200-277V-AM	120-277	92	20	Frost cover	3000K	2240
CREST2-4835KFC						3500K	2340
CREST2-4840KFC						4000K	2400
CREST2-4830K15	CREST2-L1200-277V-AL	120-277	92	20	15°	3000K	1773
CREST2-4835K15						3500K	1851
CREST2-4840K15						4000K	1900
CREST2-4830K30	CREST2-L1200-277V-AL	120-277	92	20	30°	3000K	2240
CREST2-4835K30						3500K	2340
CREST2-4840K30						4000K	2400

* Included: 1pc LED fixture, 2pcs screws


Accessories

Catalog No.	Description	Image
IC-CREST2-59 Input cable	Input cable Length 59"	
IC-CREST2-120 Input cable	Input cable Length 120"	


Accessories

Catalog No.	Description	Image
SC-CT2-12 Soft connector	Soft connector Length 12"	
SC-CT2-59 Soft connector	Soft connector Length 59"	

Wiring

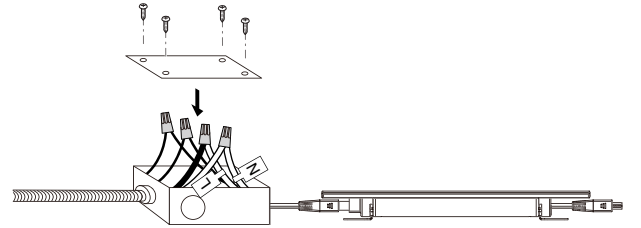

Installation

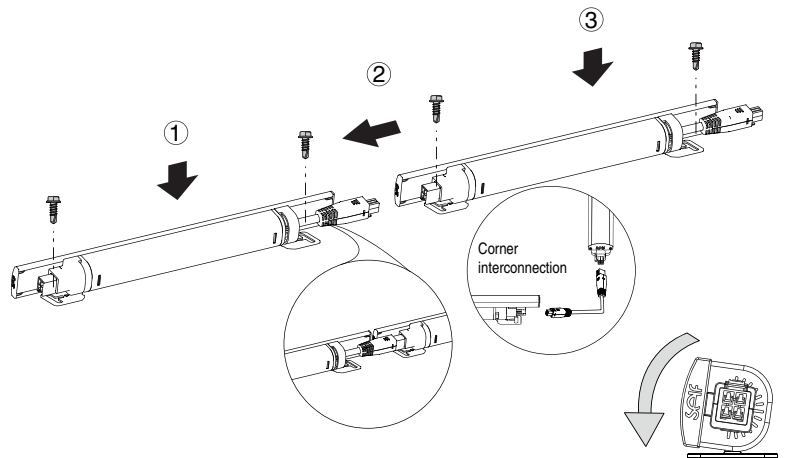

Application

