






- Even light distribution
- Linkable available, max. linkable length:
72' @120VAC, 156' @277VAC
- Dimmable, 1-10V dimming to 10%-100%
- IP rating: IP65 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F(-25°C~35°C)
- 10.5W/ft, 1575 lm/ft(@4000K)

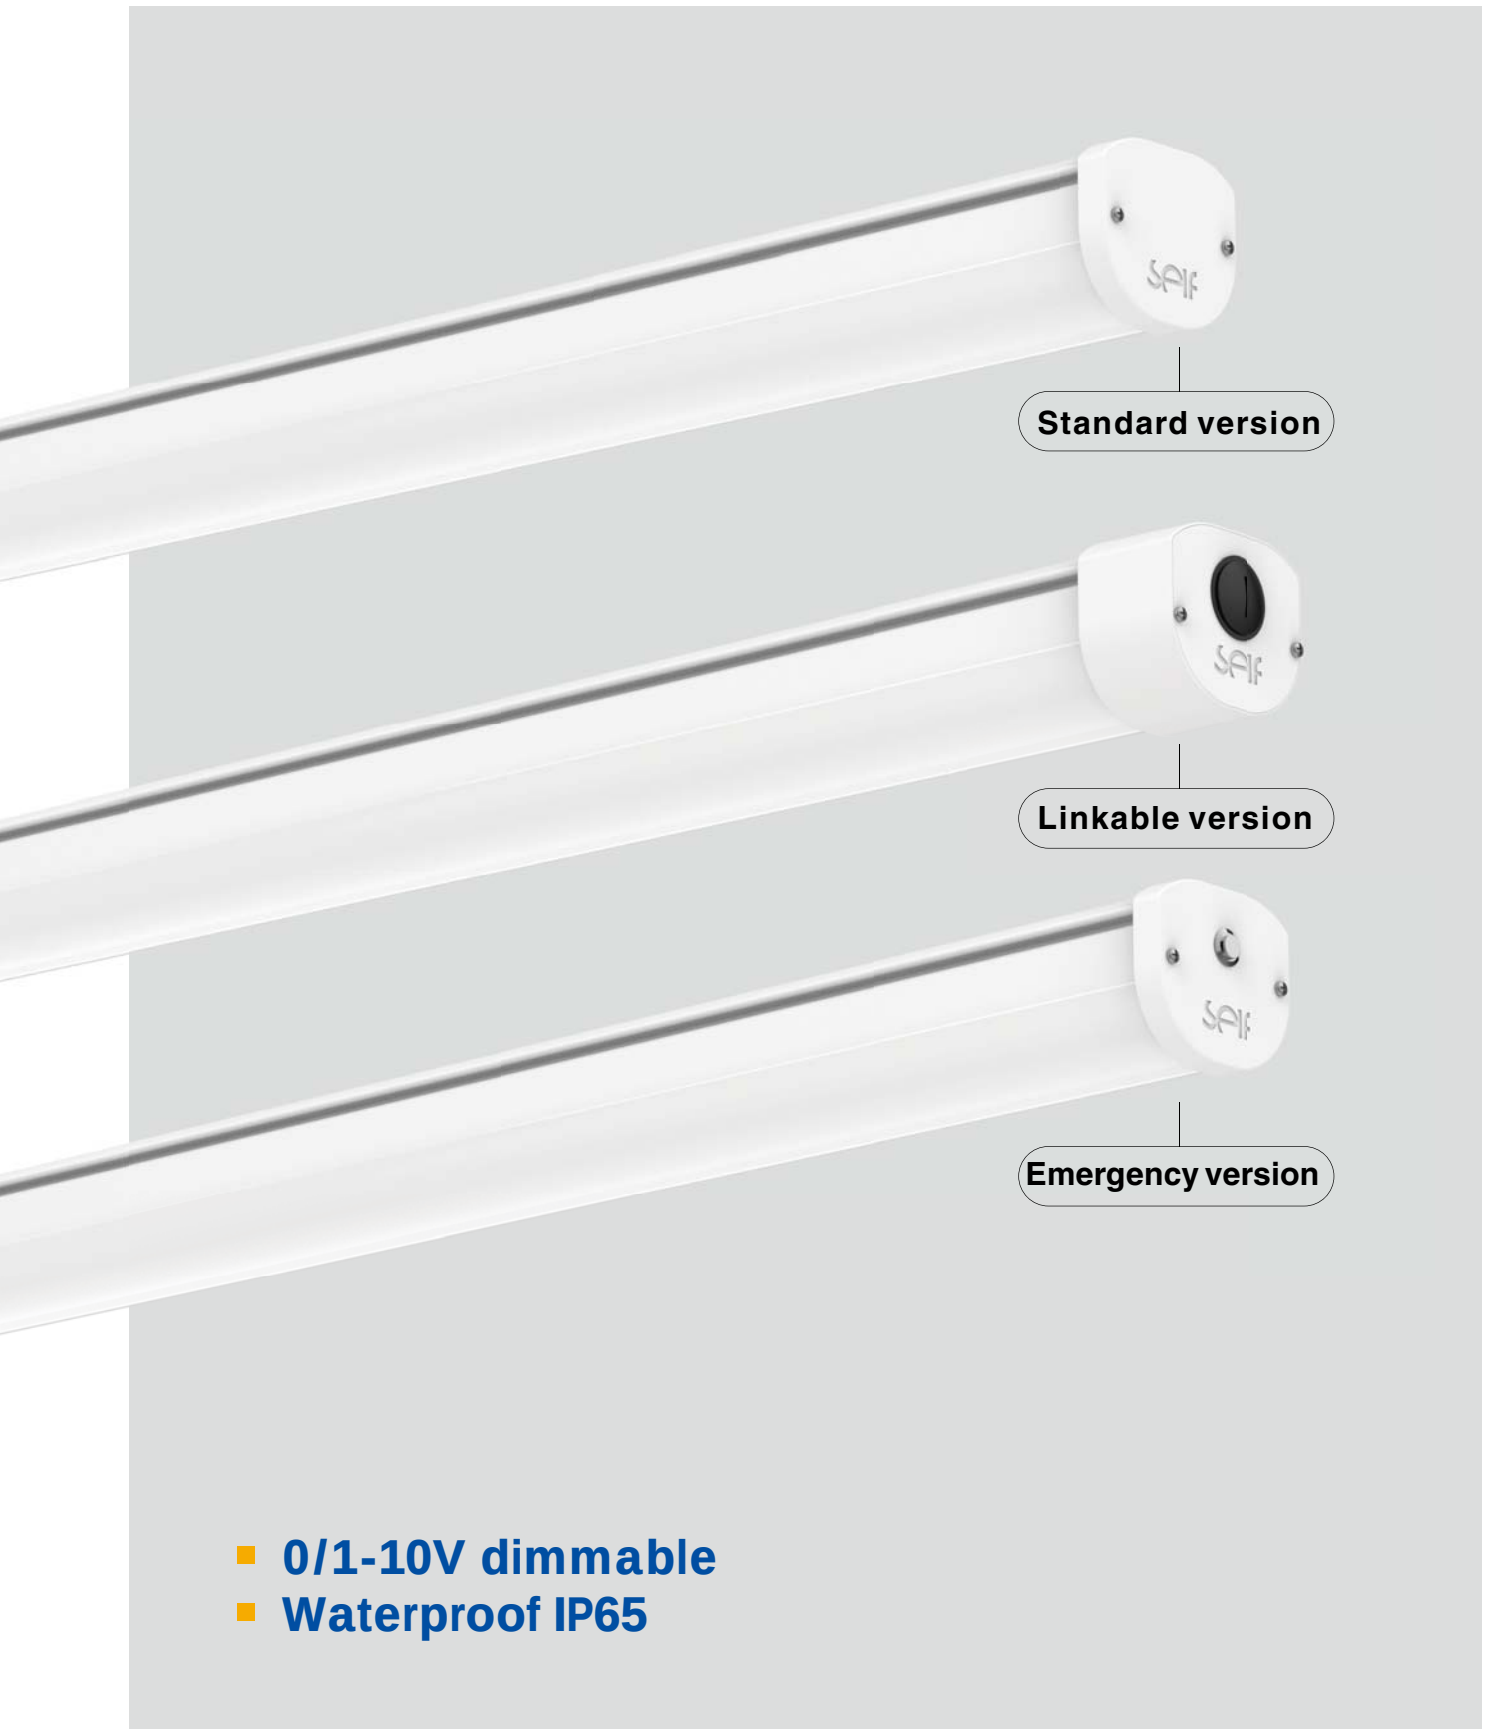


APPLICATION

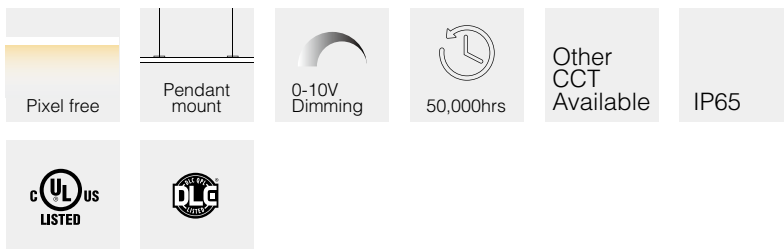

Dimensions: inches, (mm)

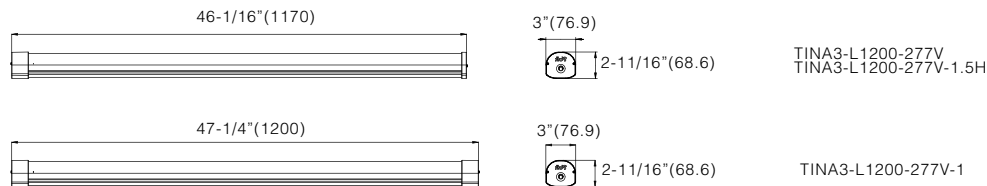


Photometrics



49 TINA3 Ceiling Lighting

How to order using our catalog numbers

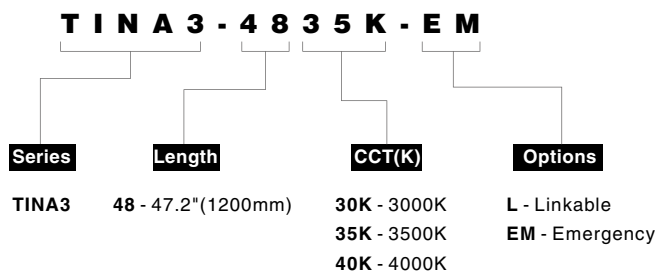

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	Length	CCT	Luminous flux (lm)	Max. Linkable
TINA3-4830K	TINA3-L1200-277V	120-277	83	42	120°	47.2"	3000K	5878	Unlinkable
TINA3-4835K							3500K	6136	
TINA3-4840K							4000K	6300	
TINA3-4830K-L	TINA3-L1200-277V-1	120-277	83	42	120°	47.2"	3000K	5878	Linkable
TINA3-4835K-L							3500K	6136	
TINA3-4840K-L							4000K	6300	
TINA3-4830K-EM	TINA3-L1200-277V-1.5H	120-277	83	45	120°	47.2"	3000K	5878	Unlinkable
TINA3-4835K-EM							3500K	6136	
TINA3-4840K-EM							4000K	6300	

* For TINA3-L1200-277V-1.5H

Battery: Rechargeable LiFePO4 6.4V,min 90-minute emergency illumination

Battery charge time: 24hours

Emergency output: Constant power 8W,1400lm

Test Button: press<2s(emergency function testing)

press>2s(close the emergency function)

red LED ON(battery charging)


red LED OFF(battery no charging)

Accessories

Catalog No.	Description	Image
MC-TINA3 Mounting package (included)	Mounting Bracket x2	
	Gasket x2	
	Expansion screw x2	
	Screw x2	
AC15-PT Aircraft cable	Aircraft cable without ceiling plate canopy Length: 15ft	


Installation

Surface mounting

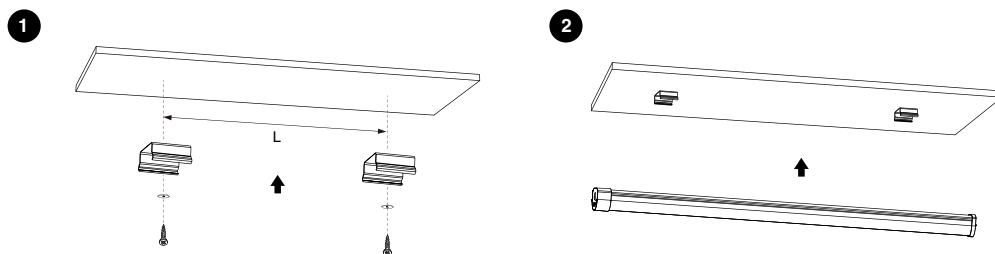


Installation

Pendant mounting

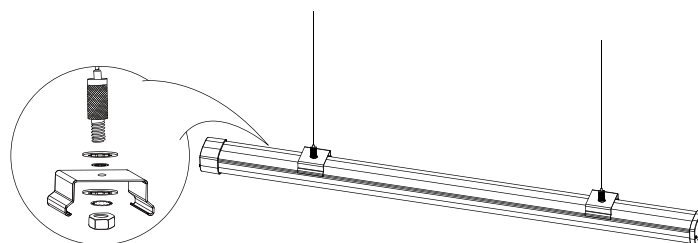

Wiring

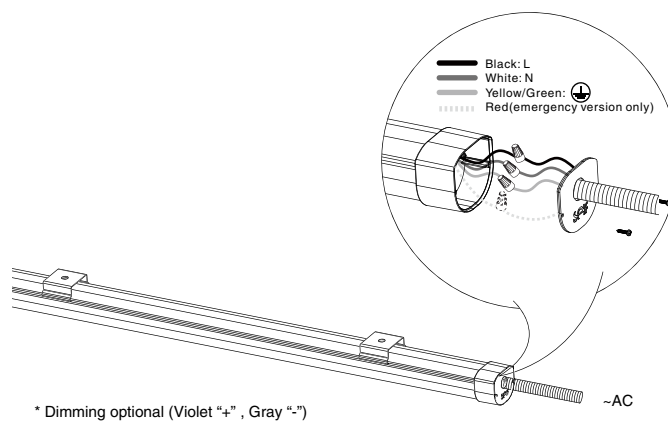

Linkable wiring
(TINA3-L1200-277V-1)

