

SLPU-2P1U1C-RC-BK



ELECTRICAL

With 1 × USB-A charger port (Rated 5Vdc, 3.1A)
With 1 × USB-C charger port
(Rated 5VDC 3.1A, 9VDC 2A, 12VDC 1.5A)
USB charger built-in open circuit, short circuit, over load protection
2 × TR AC Receptacles, rated 15A, 125Vac
10' 14 AWG × 3C power cord with 5-15P plug

MECHANICAL

Recessed mounting

CERTIFICATION


FCC compliant and UL Listed

WARRANTY


5 Years

Installation


Dimension(inches/mm)

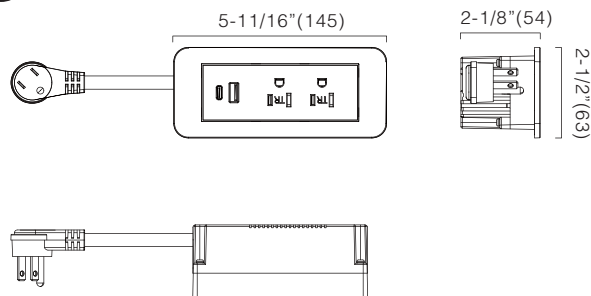

Cut hole size:
4-3/4"×2-1/16" (120mm×52mm)

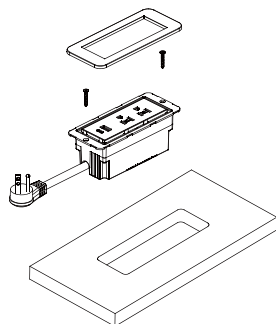

Cut hole size:
5-3/8"×2-1/16" (136mm×52mm)

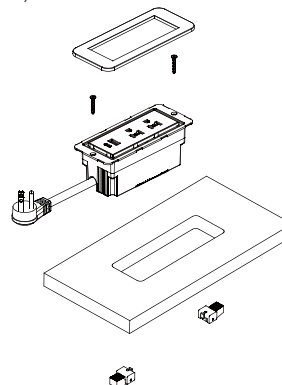

*Thickness of the board: 8~35mm

SLPU-2P1U1C-RC-WH



ELECTRICAL

With 1 × USB-A charger port (Rated 5Vdc, 3.1A)
With 1 × USB-C charger port
(Rated 5VDC 3.1A, 9VDC 2A, 12VDC 1.5A)
USB charger built-in open circuit, short circuit, over load protection
2 × TR AC Receptacles, rated 15A, 125Vac
10' 14 AWG x 3C power cord with 5-15P plug

MECHANICAL

Recessed mounting

CERTIFICATION


FCC compliant and UL Listed

WARRANTY


5 Years

Installation


Dimension(inches/mm)

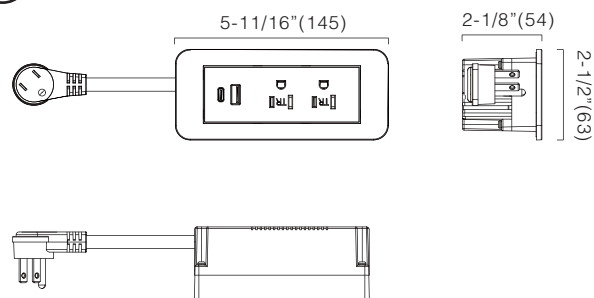

Cut hole size:
4-3/4"×2-1/16"(120mm×52mm)

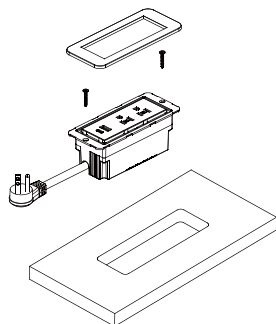

Cut hole size:
5-3/8"×2-1/16"(136mm×52mm)

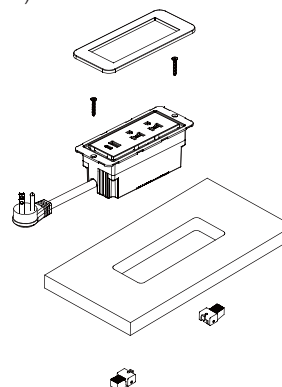

*Thickness of the board:8~35mm

SLPU-2P1U1C-RC-NI



ELECTRICAL

With 1 × USB-A charger port (Rated 5Vdc, 3.1A)
 With 1 × USB-C charger port
 (Rated 5VDC 3.1A, 9VDC 2A, 12VDC 1.5A)
 USB charger built-in open circuit, short circuit, over load protection
 2 × TR AC Receptacles, rated 15A, 125Vac
 10' 14 AWG × 3C power cord with 5-15P plug



MECHANICAL

Recessed mounting



CERTIFICATION

FCC compliant and UL Listed



WARRANTY


5 Years




Installation




Dimension(inches/mm)

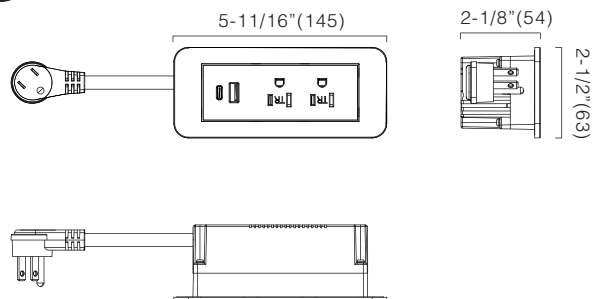

Cut hole size:
4-3/4"×2-1/16" (120mm×52mm)



Cut hole size:
5-3/8"×2-1/16" (136mm×52mm)

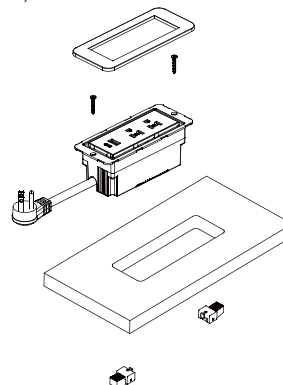

*Thickness of the board:8~35mm