

Showcase Lighting

ASPEN2




Showcase Lighting



- Plug & play (External power supply)
- Anti-glare design
- Delicate and exquisite shape
- Bright and consistent illuminance for display area
- Customized height is available
- $R_a > 90$, $R_9 > 50$
- Lifetime: 50,000hrs ($T_a = 95^\circ\text{F}$, 35°C)
- T_a : $-4^\circ\text{F} \sim 95^\circ\text{F}$ ($-20^\circ\text{C} \sim 35^\circ\text{C}$)
- Material: Aluminum alloy
- Other color temp available



Dimensions: (inches/mm)

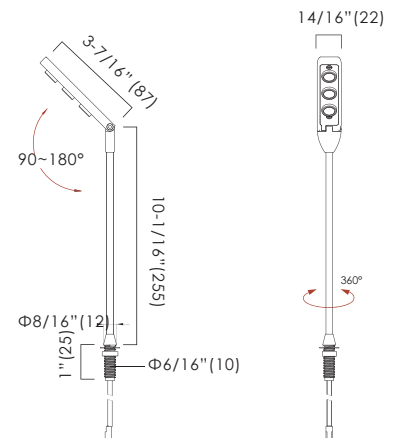

How to order using our catalog numbers
Example: ASPEN2-1140K30BN


Series	Height	CCT (K)	Beam angle	Finish	Installation
ASPEN2	11 - 10.3"(261mm)	40K - 4000K 50K - 5000K	30 - 30°	B - Black	N - Nut

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm	40W (NA159-4024LA-12A6)
ASPEN2-1140K30BN	ASPEN2-L3-24V-1	24	92	3.5	350	10pcs ^[1]
ASPEN2-1150K30BN						

* Included: 1pc LED fixture, 1pc Nut, 1pc Washer.
[1]: Max. Pcs Per UL Listed LED Power Supply.

Photometrics




Showcase Lighting


ASPEN2

Photometrics

unit:fc

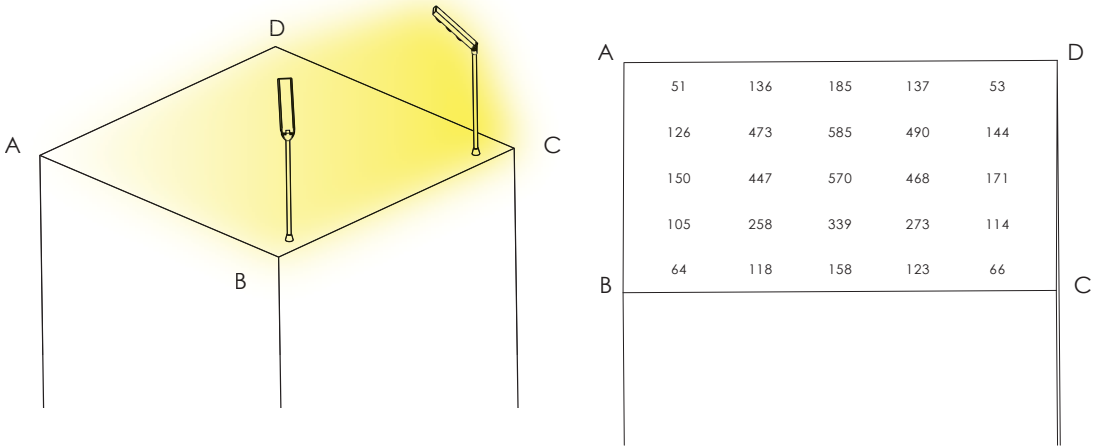

Accessories

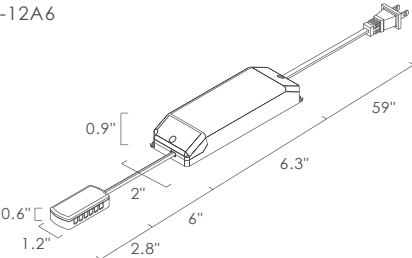Catalog No.	Description	Length (mm)	N.W. (g)
NA159-4024LA-12A6	<div>  <p>Model: SLT40-24VL-UN-A Matching driver, max. 40W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 12-way splitter JB-12A + 6" cable.</p> </div>		

Showcase Lighting

ASPEN2

Installation

