

Refrigerated Canopy Lighting

FORGE2



- Anti-glare design
- Compact and slim in design
- Smooth continuous lighting

Refrigerated Canopy Lighting


FORGE2



- Anti-glare design
- Ra > 90, R9 > 50 (@3000K, 4000K)
- Smooth continuous lighting
- Delicate and elegant appearance
- Linkable, max. linkable length: 16' per run
- Bright and consistent illuminance for display area
- IP rating: IP65 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~95°F (-25°C~35°C)
- 5W/ft, 500lm/ft
- Material: Aluminum alloy
- Other color temp available



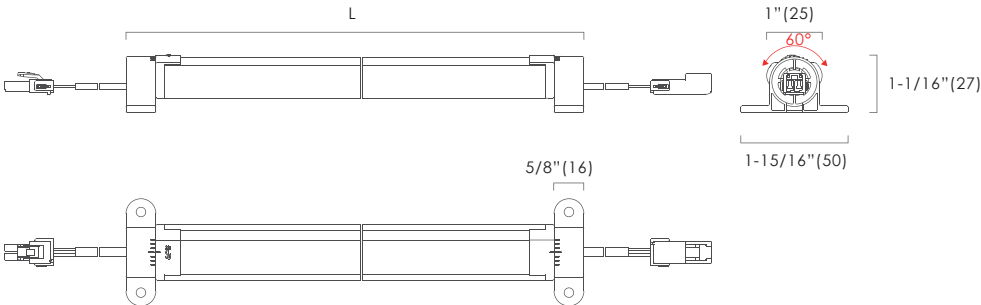Dimensions: inches, (mm)



How to order using our catalog numbers
Example: **FORGE2-3530K**


Series	Length	CCT (K)	Finish	Installation
FORGE2	35 - 34.5" (876mm) 47 - 46.5" (1181mm)	30K - 3000K 40K - 4000K	[blank] - Natural Aluminum	[blank] - Screw Mounting

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm	96W (17-9624DL-26)
FORGE2-3530K	FORGE2-L156-24V	24	92	15	1500	5pc
FORGE2-3540K						
FORGE2-4730K	FORGE2-L216-24V	24	92	20	2000	4pc
FORGE2-4740K						

* Included: 1pc led fixture, 2pcs screws


Photometrics






Refrigerated Canopy Lighting

FORGE2

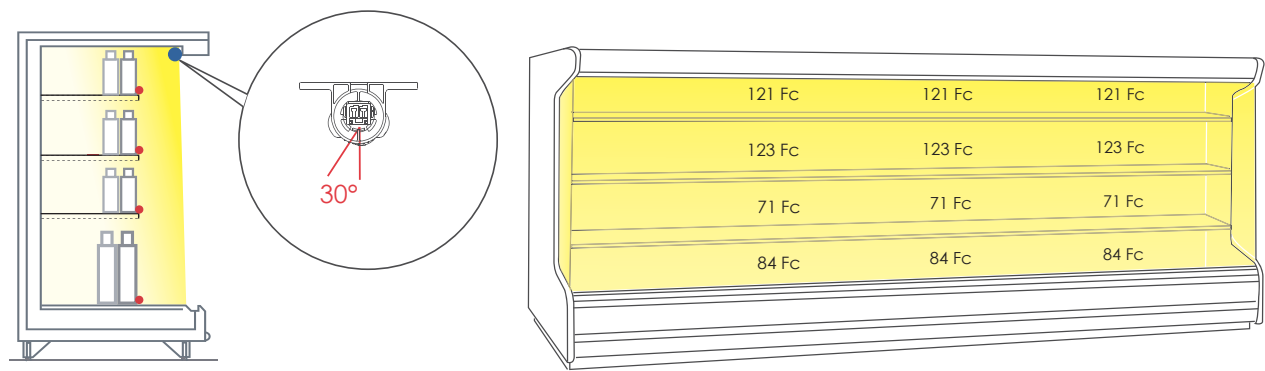Spacing Distribution of Illuminance(unit:fc)




Accessories

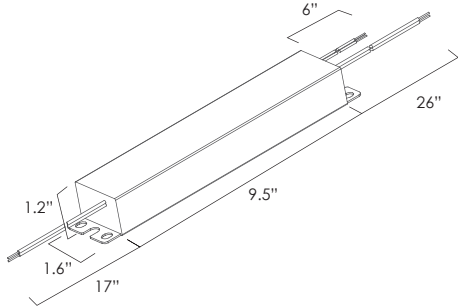Catalog No.	Description	Length (inch)
EC-CV-59	 <p>Input cable</p>	59"
JB-6-8T	 <p>6-way splitter, JB-6-4 input cable 8", end tinned</p>	8"
17-9624DL-26	 <p>Model: SLD96-24VC-UN1 Matching 1-10V dimmable driver, max. 96W. Input: 120-277VAC 17" hard wire. Output: 24VDC 26" hard wire.</p>	

Refrigerated Canopy Lighting

FORGE2

Accessories (optional)	Catalog No.	Description	Length (inch)
	EC-CV-12	 Soft connector	12"

Installation

