

Flexible Strip Lighting

RIBBON2



- Customized design length
- Flexible and compact design

Flexible Strip Lighting

RIBBON2

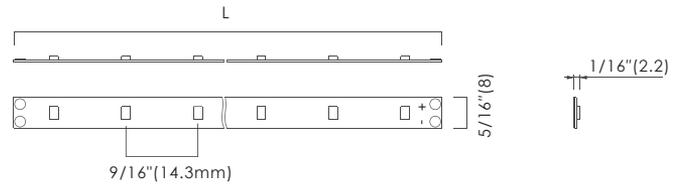


- Plug & play (External power supply)
- Customized design length
- Flexible and compact design
- Bright and constant illuminance for display area
- Linkable, max. linkable length: 16'
- Lifetime: 50,000hrs (Ta=77°F, 25°C)
- Ta: -4°F~77°F (-20°C~25°C)
- 4W/ft, 500 lm/ft (@RIBBON2)



Dimensions: inches, (mm)

Minimum Cutable Length: 3.94"(100mm)



How to order using our catalog numbers
Example: RIBBON2-19730K


Series	Length	CCT (K)	Power	Beam Angle	Finish	Installation
RIBBON2	197 - 196.9"(5001.5mm)	27K - 2700K 30K - 3000K	[blank] - 4W/ft	[blank] - 120°	[blank] - White	[blank] - Adhesive Tape

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@3000K)lm	75W (NA159-7524LA-6V6)
RIBBON2-19727K	RIBBON2-F350-24V	24	85	65	8000	1pc ^[1]
RIBBON2-19730K						





* Included: 1pc LED fixture with double-sided adhesive tape.
[1]: Max. pcs Per UL Listed LED Power Supply.

Photometrics



Flexible Strip Lighting

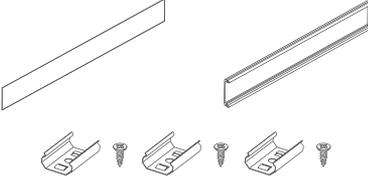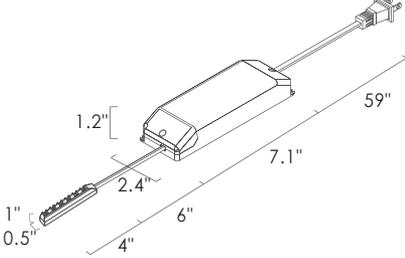RIBBON2


Accessories	Catalog No.	Description	Length (inch)
	IC-RB-59	 Input cable (must be between the light and splitter)	59"
	MCN-RB-69	 Mounting channel with cover	69"
	NA159-7524LA-6V6	 Model: SLT75-24VL-2A Matching driver, max. 75W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 6-way splitter JB-6-4 + 6" cable.	
Accessories(optional)	Catalog No.	Description	Length (inch)
	SC-RB-2	 Soft connector	2"
	SC-RB-12	 Soft connector	12"
	HC-RB	 Hard connector	-

Flexible Strip Lighting

RIBBON2

Installation

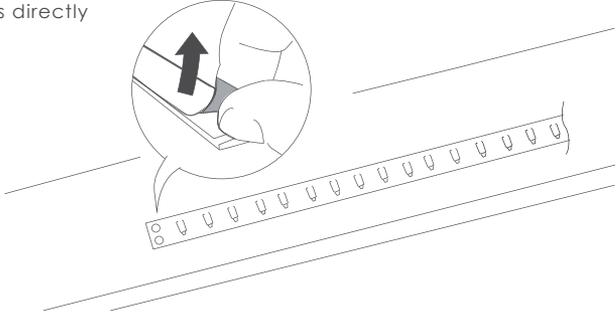Install LED fixtures directly



Install LED fixtures MCN-RB-69

