

Flexible Strip Lighting

FLEXIP2



Flexible Strip Lighting

FLEXIP2

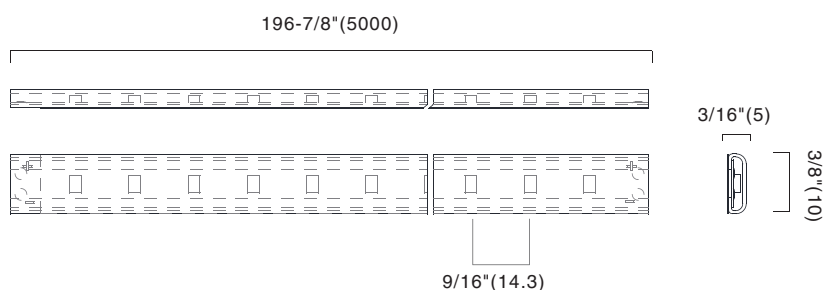


- Plug & play (External power supply)
- Customized design length
- Flexible and compact design
- Flexible strip with protective sheath
- Linkable, max. linkable length: 16'
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -4°F~95°F (-20°C~35°C)
- 3W/ft, 120lm/ft
- Other color temp available



Dimensions: inches, (mm)

Minimum Cuttable Length: 3.94" (100)



How to order using our catalog numbers

Example: FLEXIP2-19730K3


Series	Length	CCT (K)	Power	Finish	Installation
FLEXIP2	197 - 196.9" (5001.5mm) XX - Custom	27K - 2700K 30K - 3000K	3 - 3W/ft	[blank] - White	[blank] - Adhesive Tape

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@3000K)lm	75W (NA159-7524LA-6V6)
FLEXIP2-19727K3	FLEXIP2-F350-24V	24	85	50	6000	1pc ^[1]
FLEXIP2-19730K3						

* included: 1pc LED fixture with double-sided adhesive tape.
[1]: Max. pcs per UL listed LED power supply.


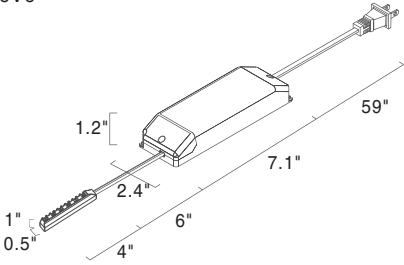
Photometrics






Flexible Strip Lighting

FLEXIP2

Accessories

Catalog No.	Description	Length (inch)
IC-RB-59	 <p>Input cable (must be between the light and splitter)</p>	59"
NA159-7524LA-6V6	 <p>Model: SLT75-24VL-2A Matching driver, max. 75W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 6-way splitter JB-6-4 + 6" cable.</p>	

Accessories(optional)

Catalog No.	Description	Length (inch)
SC-RB-2	 <p>Soft connector</p>	2"
SC-RB-12	 <p>Soft connector</p>	12"
HC-RB	 <p>Hard connector</p>	-

Flexible Strip Lighting

FLEXIP2

Installation

Install LED fixtures directly

