

Vaportight Lighting TINA



- 0/1-10V dimmable
- Waterproof IP65

Vaportight Lighting


TINA



- Even light distribution
- Tool-less slide-in structure for easy installation
- Linkable, max. linkable length: 72' @120VAC, 156' @277VAC
- Dimmable, 1-10V dimming to 10%-100%
- Works with occupancy sensor SHA-B-277V
- IP rating: IP65 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F(-25°C~50°C)
- Material: Aluminum alloy
- 10W/ft, 1150 lm/ft(@4000K)
- Other color temp available



Dimensions: inches, (mm)

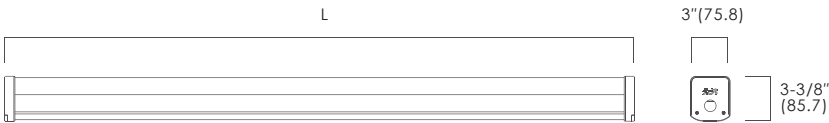

How to order using our catalog numbers
Example: TINA-2440K120WC0


Series	Length	CCT (K)	Beam Angle	Finish	Installation
TINA	24 - 23.6"(600mm)	40K - 4000K	120 - 120°	W - White	C0 - Mounting Clip 0°
	48 - 47.1"(1197mm)	50K - 5000K			

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm
TINA-2440K120WC0	TINA-L60-277V	120-277	85	20	2300
TINA-2450K120WC0					
TINA-4840K120WC0	TINA-L120-277V	120-277	85	40	4600
TINA-4850K120WC0					

* 1pc LED fixture, 2pcs mounting clips, 2pcs screws, 2pcs expansion screws, 2pcs flat clips,10pcs wire nuts.

Photometrics




Vaportight Lighting


TINA

Installation



1

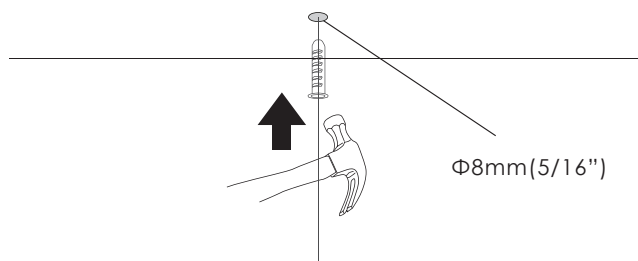

2

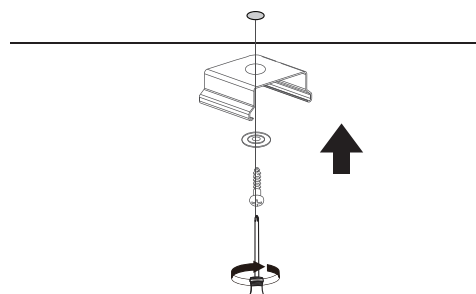

3

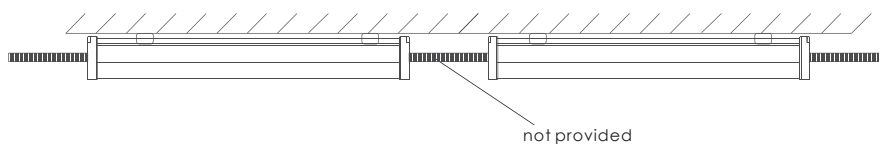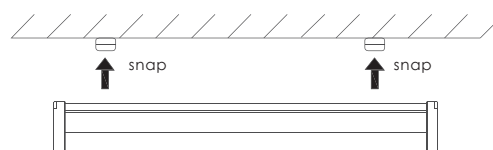

Vaportight Lighting TINA

Installation

