



① Recommended Installation Location:

Suitable for use in wall, ceiling, suspending ceiling.

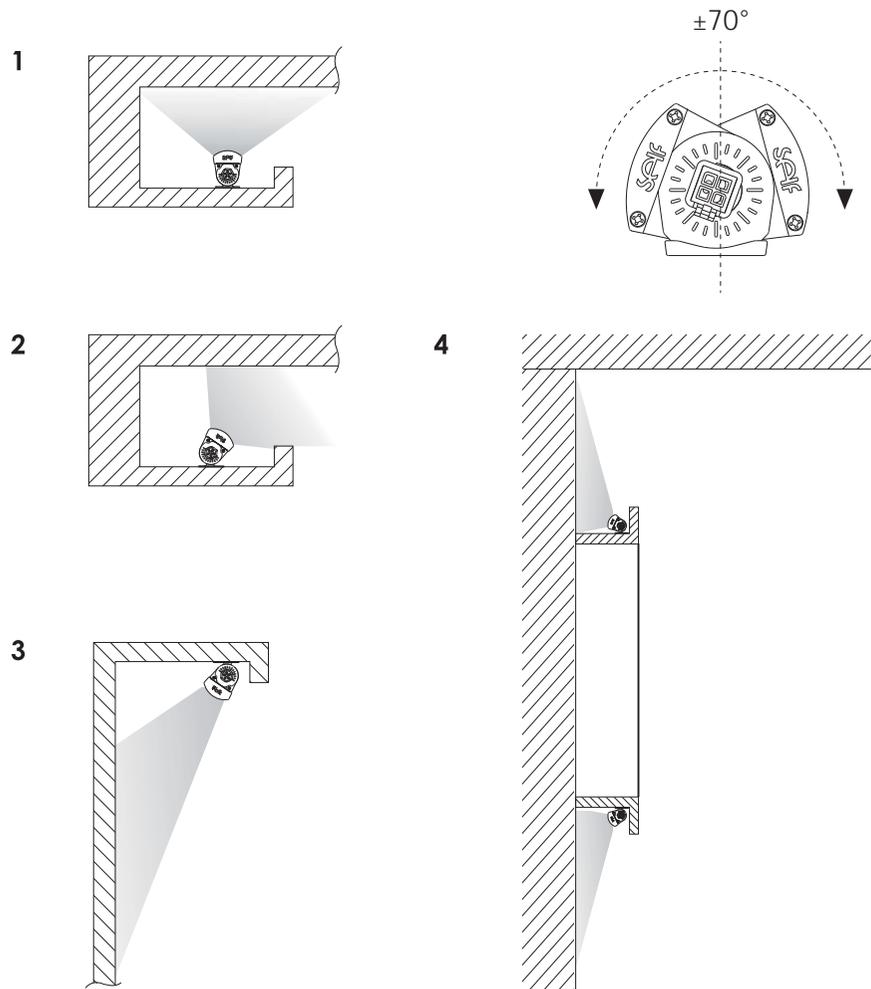

CREST

CREST NARROW

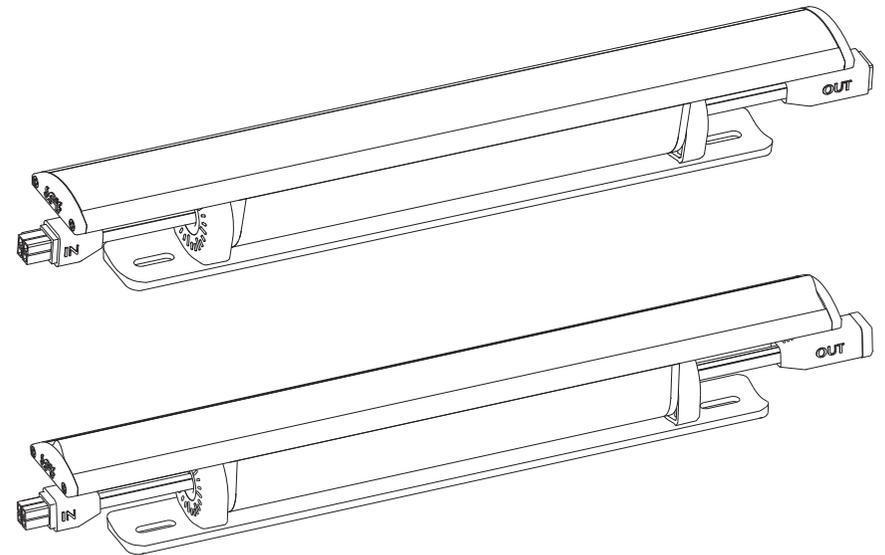

INSTRUCTION MANUAL

SERIES: CREST/CREST NARROW

Read these instructions completely and carefully.

ATTENTIONS

RISK OF ELECTRIC SHOCK


- Turn power off before inspection, installation or removal.
- Properly ground electrical enclosure.

RISK OF FIRE

- Follow all NEC and local codes.
- Use only UL approved wire for input/output connections. Minimum size 18 AWG


THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED

Dimensions: (inches/mm)

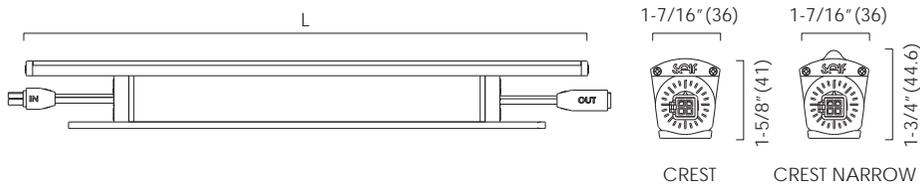


Specifications:

Mode	Length	Rated Input	Wattage	Minimum Mounting Space (LXWXH)	Max. Linkabe No.	ta
CREST-L12-277V	11-13/16" (300)	AC120-277V	5W	12-5/8"X3-1/8"X3-15/16" (320X80X100)	100pcs	-4°F~95°F (-20°C~35°C)
CREST-L48-277V	47-1/4" (1200)		20W	48-7/16"X3-1/8"X3-15/16" (1230X80X100)	30pcs	
CREST NARROW-L12-277V	11-13/16" (300)		5W	12-5/8"X3-1/8"X3-15/16" (320X80X100)	100pcs	
CREST NARROW-L48-277V	47-1/4" (1200)		20W	48-7/16"X3-1/8"X3-15/16" (1230X80X100)	30pcs	

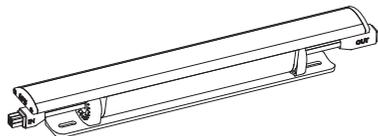


CREST

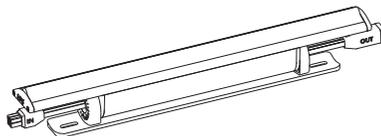


CREST NARROW


Components:

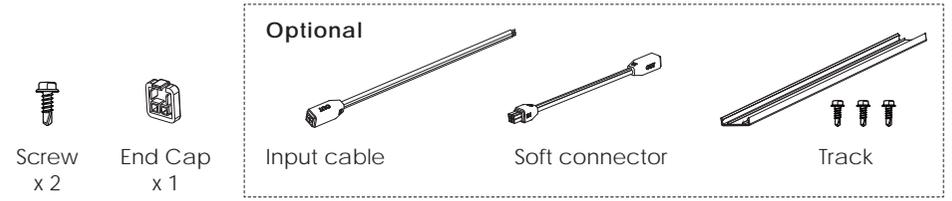


Tools:



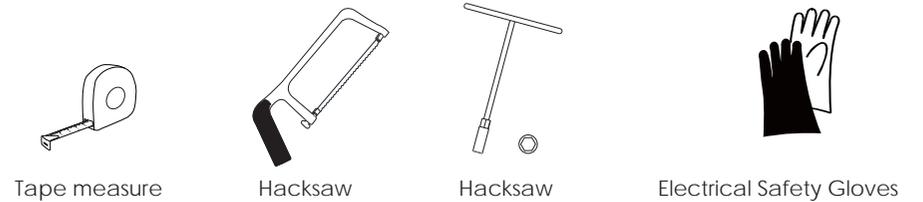


Install LED fixtures on the cove directly with screws:

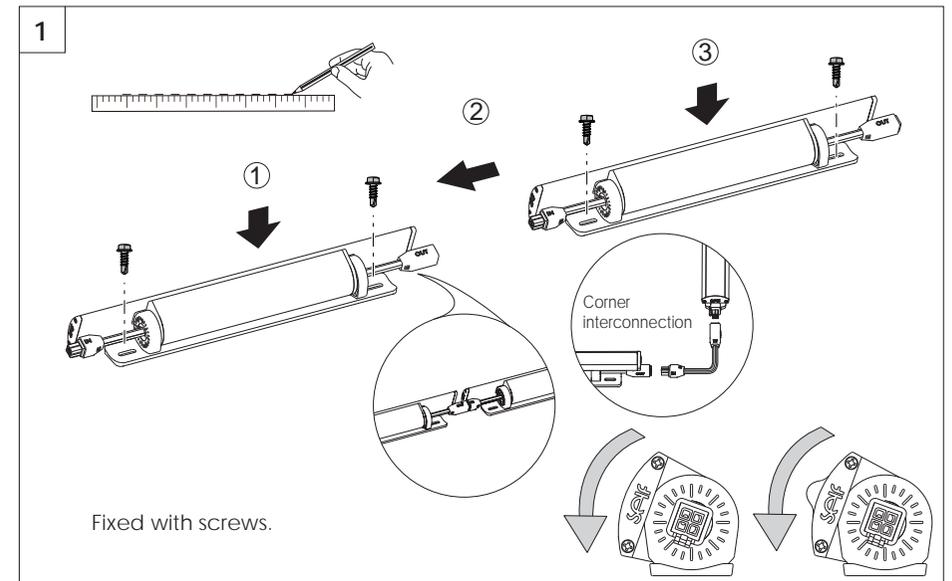

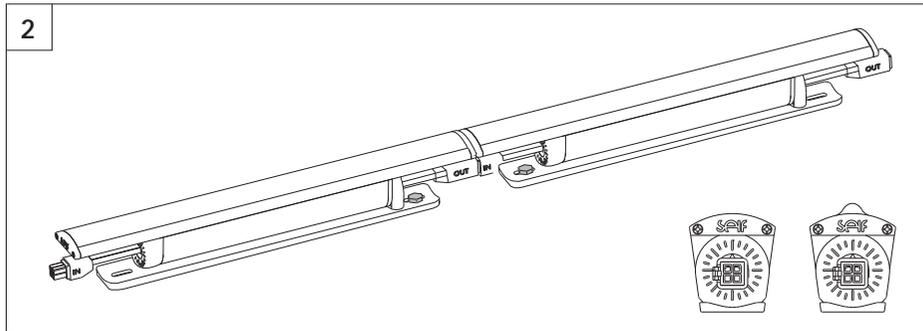



i Install LED fixtures on the mounting track:

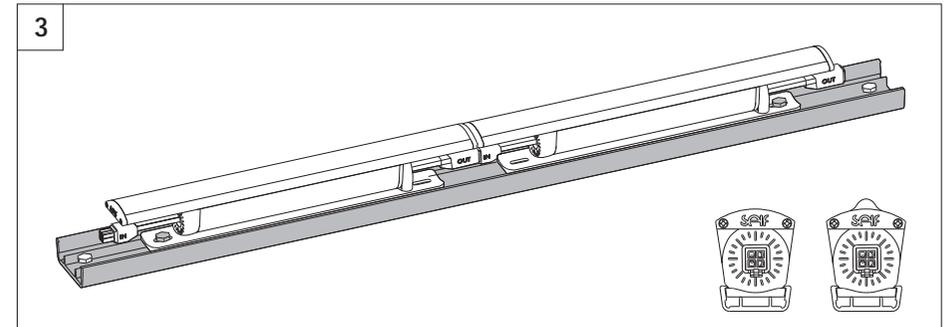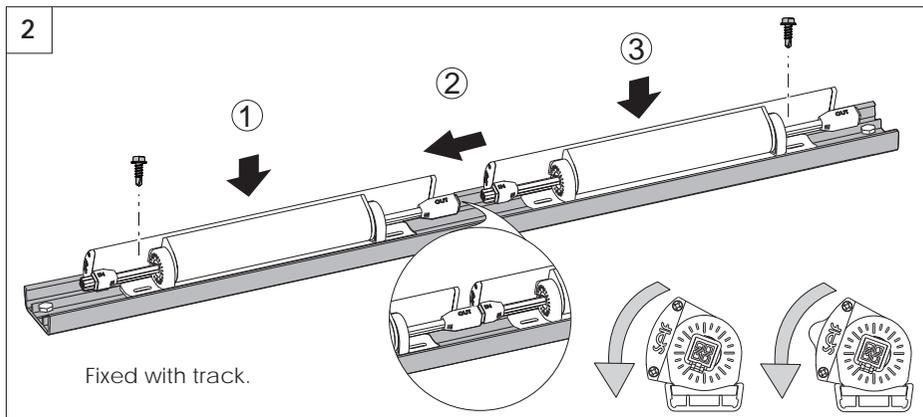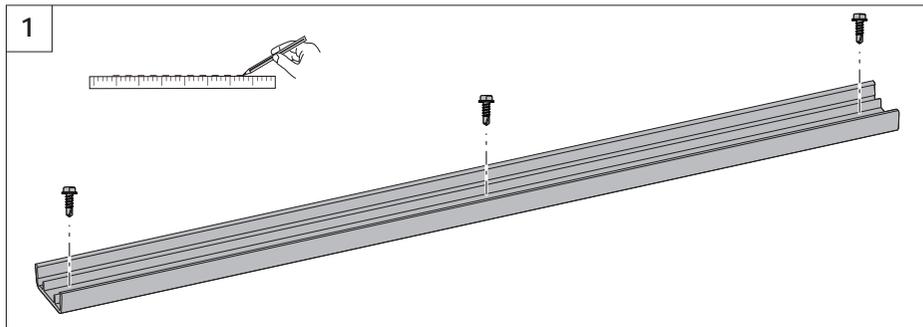

i Wiring diagram:

1. A suitable strain relief means should be added at the entrance of junction box.
2. In the junction box, the dimming wiring and branch wiring shall be permanently separated a minimum 6.4 mm.

Dimming range:

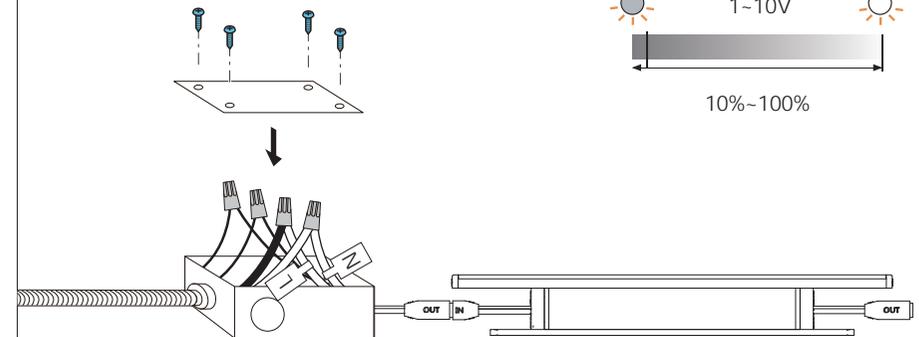

AC connection:



Dimming connection:

