

# Outdoor Cove Lighting CROWN



- 0/1-10V dimmable
- $\pm 85^\circ$  vertical rotation
- Waterproof IP66

# Outdoor Cove Lighting CROWN



- Quick connection
- Dimmable, 1-10V dimming to 10%-100%
- Linkable, max. linkable length: 72' @120VAC, 156' @277VAC
- Lockable, precision aiming adjustment: ±85°vertical rotation
- IP rating: IP66 (for wet locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~122°F (-25°C~50°C)
- 10W/ft, 1050lm/ft
- Material: Aluminum alloy
- Other color temp available



Dimensions: inches, (mm)



How to order using our catalog numbers  
Example: CROWN-1230K110SS


| Series | Length            | CCT (K)     | Beam Angle | Finish     | Installation       |
|--------|-------------------|-------------|------------|------------|--------------------|
| CROWN  | 12 - 11.8"(300mm) | 30K - 3000K | 110 - 110° | S - Silver | S - Screw Mounting |
|        | 47 - 47"(1120mm)  | 35K - 3500K |            |            |                    |
|        | 70 - 70"(1778mm)  | 40K - 4000K |            |            |                    |

## Specifications

| Catalog No.      | Model           | Rated Input (VAC) | Ra | Power (W) | Luminous flux (TYP@4000K)lm |
|------------------|-----------------|-------------------|----|-----------|-----------------------------|
| CROWN-1230K110SS | CROWN-L24-277V  | 120-277           | 90 | 10        | 1050                        |
| CROWN-1235K110SS |                 |                   |    |           |                             |
| CROWN-1240K110SS |                 |                   |    |           |                             |
| CROWN-4730K110SS | CROWN-L90-277V  | 120-277           | 90 | 40        | 4200                        |
| CROWN-4735K110SS |                 |                   |    |           |                             |
| CROWN-4740K110SS |                 |                   |    |           |                             |
| CROWN-7030K110SS | CROWN-L144-277V | 120-277           | 90 | 60        | 6300                        |
| CROWN-7035K110SS |                 |                   |    |           |                             |
| CROWN-7040K110SS |                 |                   |    |           |                             |

\* Included: 1 pc LED fixture, 2pcs screws.


## Photometrics



# Outdoor Cove Lighting

## CROWN/CROWN NARROW

### Wiring Diagram

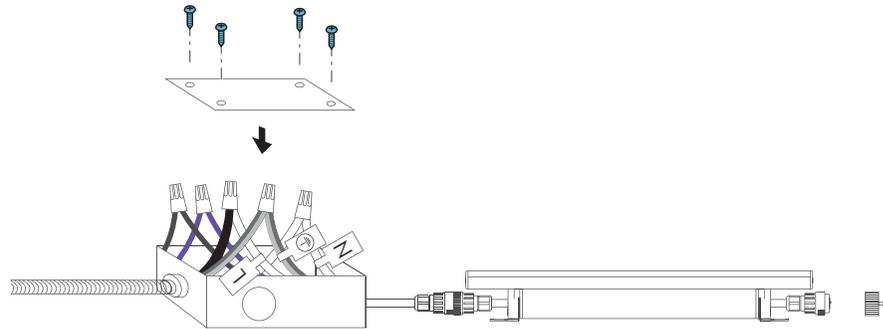


AC connection :

Black: " L "

White: " N "

Yellow/green: " ⊕ "






Dimming connection :


Violet: " + " \_\_\_\_\_

Gray: " - " \_\_\_\_\_

### Accessories


| Catalog No.  | Description  | Length (inch) |
|--------------|--|---------------|
| IC-CROWN-59  | <br>Input cable | 59"           |
| IC-CROWN-84  | <br>Input cable | 84"           |
| IC-CROWN-180 | <br>Input cable | 180"          |

### Accessories(optional)

| Catalog No. | Description  | Length (inch) |
|-------------|--|---------------|
| SC-CROWN-12 | <br>Soft connector | 12"           |
| SC-CROWN-48 | <br>Soft connector | 48"           |
| SC-CROWN-96 | <br>Soft connector | 96"           |

# Outdoor Cove Lighting CROWN/CROWN NARROW

## Installation

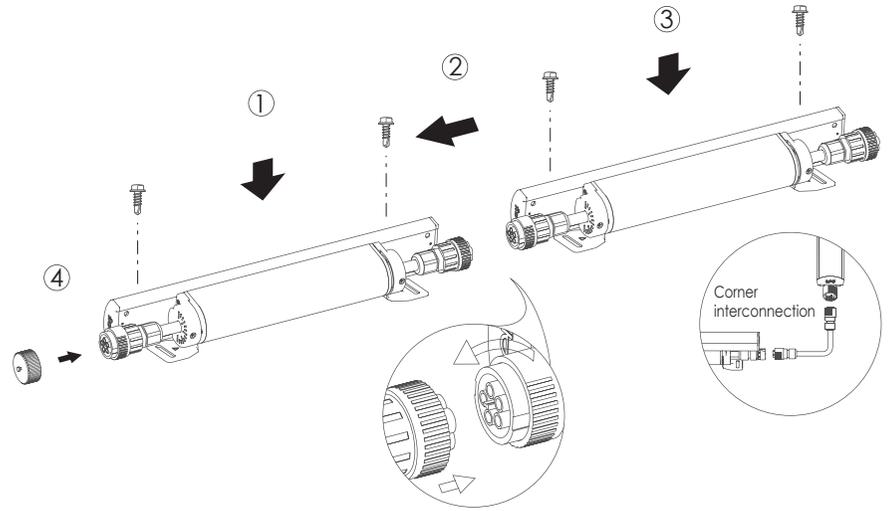

## Application

