


Shelf Lighting

SATIN2

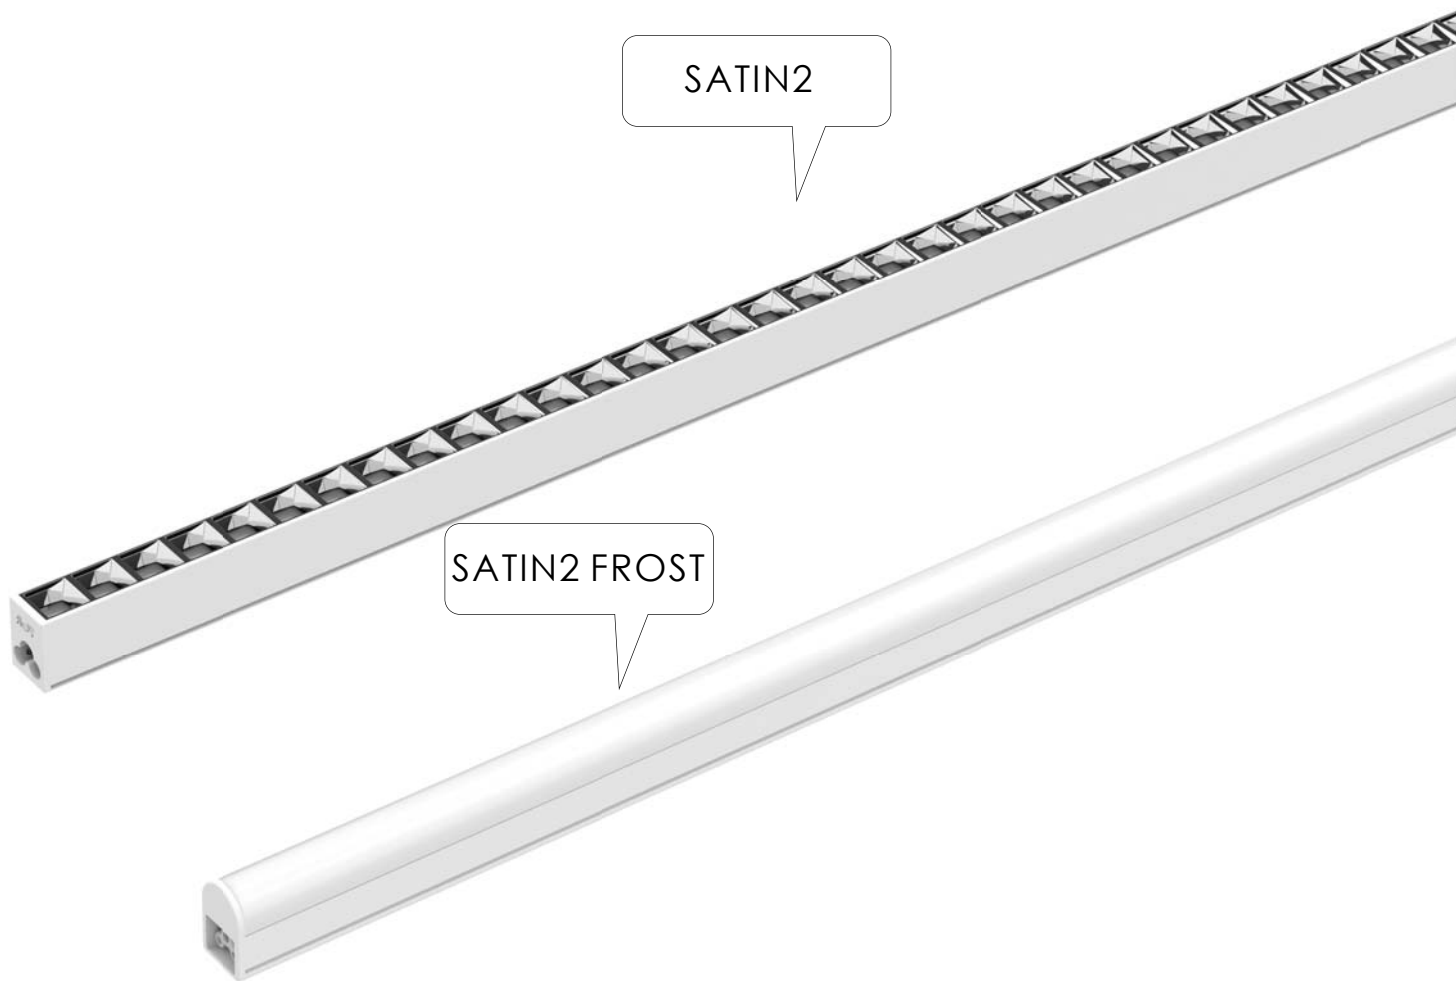

- Line voltage fixture
- Anti-glare is achieved through patented optical design
- Phase cut dimmable

Shelf Lighting

SATIN2




Available Q2 2021

- Quick connection
- Linkable, max. linkable length: 50'@120VAC
- Anti-glare is achieved through patented optical design
- Dimmable, 10%-100% by trailing edge or leading edge dimmers@120VAC
- Lifetime: 50,000hrs($t_a=95^\circ\text{F}$, 35°C)
- $T_a: -13^\circ\text{F} \sim 122^\circ\text{F}$ ($-25^\circ\text{C} \sim 50^\circ\text{C}$)
- 4w/ft, 450lm/ft
- Material: Aluminum alloy



Dimensions: inches, (mm)

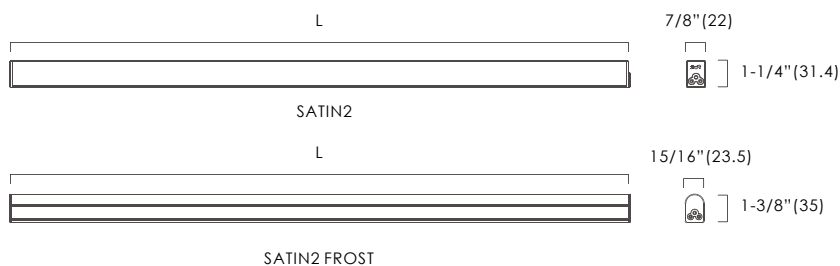

How to order using our catalog numbers

Example: SATIN2-4530K70


Series	Lens	Length	Color Temp	Beam Angle	Finish	Installation
SATIN2	[blank] - Reflector R - Round Milky	45 - 44.8" (1138mm)	30K - 3000K 40K - 4000K	70 - 70° (SATIN2) [blank] - 120° (SATIN2 FROST)	[blank] - Natural Aluminum	[blank] - Mounting Clips

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm
SATIN2-4530K70	SATIN2-L56-120V	120	85	20	2200
SATIN2-4540K70					
SATIN2-R4530K	SATIN2 FROST-L140-120V	120	85	20	2200
SATIN2-R4540K					



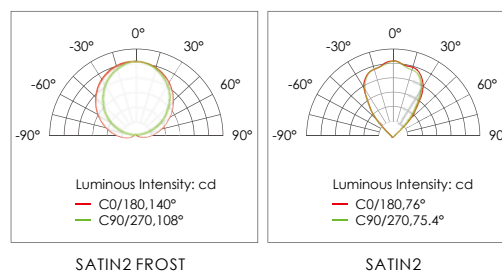



* Included: 1 pc LED fixture, 2 pcs screws, 2 pcs mounting clips

Photometrics



Shelf Lighting

SATIN2


Accessories	Catalog No.	Description	Length (inch)
	IC-SATIN2-59	 Input cable	59"
	IC-SATIN2-59P	 Input cable	59"
Accessories (optional)	Catalog No.	Description	Length (inch)
	MC-SATIN2 (included)	 0° mounting clip x2	-
	MC30-SATIN2	 30° mounting clip x2	-
	SC-SATIN2-12	 12" Soft connector	12"
	HC-SATIN2	 Hard connector	-

Shelf Lighting

SATIN2

Installation

30° Installation

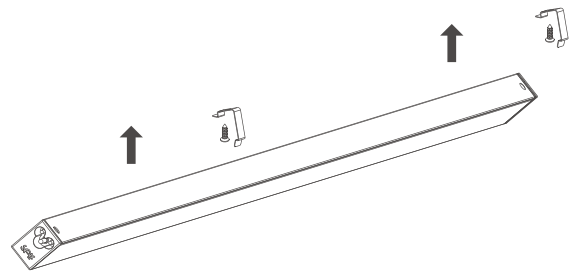

0° Installation

