

# Flexible Strip Lighting

## FLEX2



- Customized design length
- Flexible and compact design

# Flexible Strip Lighting

## FLEX2

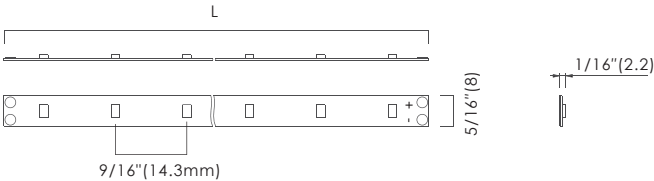


- Plug & play (External power supply)
- Customized design length
- Flexible and compact design
- Bright and constant illuminance for display area
- Linkable, max. linkable length: 16'
- Lifetime: 50,000hrs (Ta=77°F, 25°C)
- Ta: -4°F~77°F (-20°C~25°C)
- 3W/ft, 390lm/ft
- 1W/ft, 135lm/ft



Dimensions: inches, (mm)

Minimum Cuttable Length: 3.94"(100mm)



How to order using our catalog numbers  
Example: FLEX2-19727K


Series	Length	CCT (K)	Power	Beam Angle	Finish	Installation
FLEX2	197 - 196.9"(5001.5mm)	27K - 2700K 30K - 3000K	[blank] - 3W/ft 1 - 1W/ft	[blank] - 120°	[blank] - White	[blank] - Adhesive Tape

### Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@3000K)lm	75W (NA159-7524LA-6V6)
FLEX2-19727K FLEX2-19730K	FLEX2-F350-24V	24	85	50	6500	1pc <sup>[1]</sup>
FLEX2-19727K1 FLEX2-19730K1	FLEX2-F350-24V-2	24	85	16.7	2260	3pcs <sup>[1]</sup>

\* Included: 1 pc LED fixture with double-sided adhesive tape.  
[1]: Max. pcs per UL listed LED power supply.


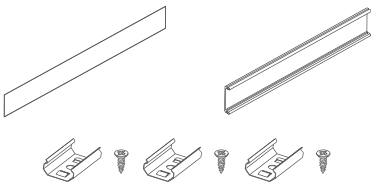
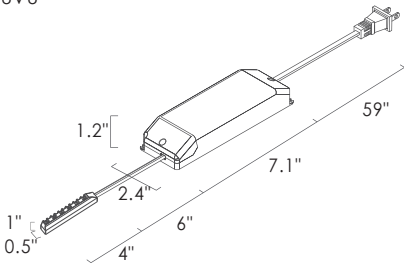
### Photometrics






# Flexible Strip Lighting

## FLEX2

### Accessories

Catalog No.	Description	Length (inch)
IC-RB-59	 <p>Input cable (must be between the light and splitter)</p>	59"
MCN-RB-69	 <p>Mounting channel with cover</p>	69"
NA159-7524LA-6V6	 <p>Model: SLT75-24VL-2A Matching driver, max. 75W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 6-way splitter JB-6-4 + 6" cable.</p>	

### Accessories(optional)

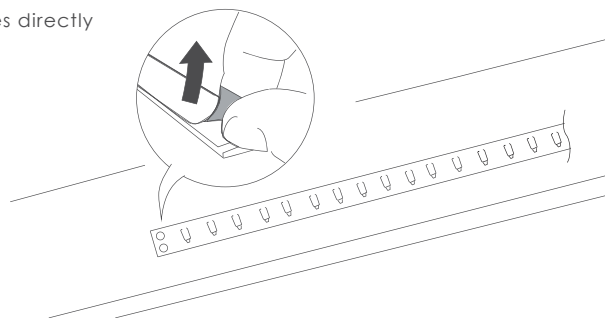
Catalog No.	Description	Length (inch)
SC-RB-2	 <p>Soft connector</p>	2"
SC-RB-12	 <p>Soft connector</p>	12"
HC-RB	 <p>Hard connector</p>	-

# Flexible Strip Lighting

## FLEX2

### Installation

Install LED fixtures directly



Install LED fixtures MCN-RB-69

