

## Refrigerated Glass Door Lighting

### FAME2




- Anti-glare design
- Compact and slim in design
- Waterproof IP65

# Refrigerated Glass Door Lighting


## FAME2



- Anti-glare design
- Delicate and elegant appearance
- Compact and slim in design
- Bright and consistent illuminance for display area
- IP Rating: IP65 (for damp locations)
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -13°F~95°F(-25°C~35°C)
- Material: Aluminum alloy
- Other color temp available



### Dimensions: inches, (mm)

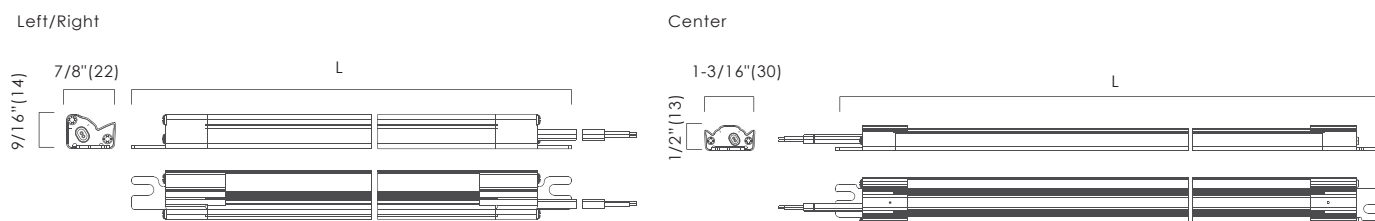

How to order using our catalog numbers  
Example: FAME2-L4740K

Series	Side	Length	CCT (K)	Finish	Installation
FAME2	L- Left	47 - 46.1" (1170mm)	40K - 4000K	[blank] - Natural Aluminum	[blank] - Screw mounting
	C - Center	57 - 56.7" (1440mm)	50K - 5000K		
	R - Right	68 - 67.3" (1710mm)			

### Specifications


Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@4000K)lm	75W (17-7524L-12)	96W (17-9624DL-26)
FAME2-L4740K	FAME2-L56-24V	24	92	6.2	651	1 pc Left	1 pc Left
FAME2-L4750K						+	+
FAME2-C4740K	FAME2-L112-24V	24	92	12.4	1421	4 pcs Center	5 pcs Center
FAME2-C4750K						+	+
FAME2-R4740K	FAME2-L56-24V-1	24	92	6.2	651	1 pc Right	1 pc Right
FAME2-R4750K							
FAME2-L5740K	FAME2-L70-24V	24	92	8	840	1 pc Left	1 pc Left
FAME2-L5750K						+	+
FAME2-C5740K	FAME2-L140-24V	24	92	16	1840	3 pcs Center	4 pcs Center
FAME2-C5750K						+	+
FAME2-R5740K	FAME2-L70-24V-1	24	92	8	840	1 pc Right	1 pc Right
FAME2-R5750K							
FAME2-L6840K	FAME2-L84-24V	24	92	8.8	924	1 pc Left	1 pc Left
FAME2-L6850K						+	+
FAME2-C6840K	FAME2-L168-24V	24	92	17.6	2254	2 pcs Center	4 pcs Center
FAME2-C6850K						+	+
FAME2-R6840K	FAME2-L84-24V-1	24	92	8.8	924	1 pc Right	1 pc Right
FAME2-R6850K							

\* Included: 1 pc LED fixture, 2pcs screws, 2pcs wire nuts.

# Refrigerated Glass Door Lighting


## FAME2

### Photometrics

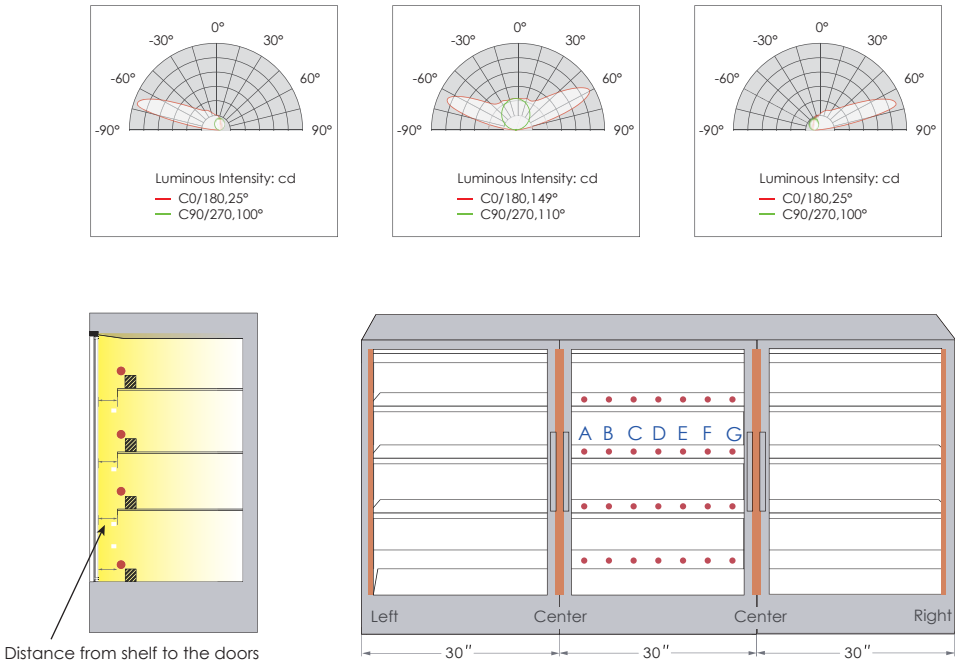


unit: fc

Distance from shelf to the doors	A	B	C	D	E	F	G
4"	230	134	103	94	106	141	229
6"	178	147	120	115	122	144	177
8"	155	144	123	119	124	140	153

Accessories	Catalog No.	Description	Length (inch)	N.W. (lb)
	17-7524L-12	 <p>Model: SLT75-24VL-2 Matching driver, max. 75W. Input: 100-240VAC 17" cable. Output: 24VDC 12" cable.</p>		

# Refrigerated Glass Door Lighting

## FAME2

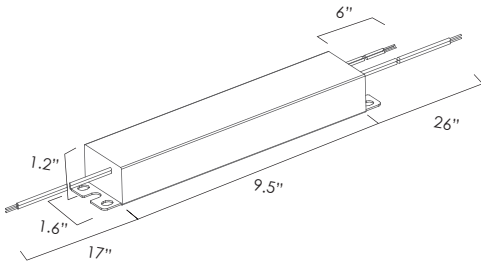Accessories	Catalog No.	Description	Length (inch)	N.W. (lb)
	17-9624DL-26	 <p>Model: SLD96-24VC-UN1            Matching 1-10V dimmable driver, max. 96W.            Input: 120-277VAC 17" hard wire.            Output: 24VDC 26" hard wire.</p>		

### Installation

