

LED Power Supply

CV Version



Features


- UL Listed power supply for constant voltage LED lamp
- UL 8750 class 2 output
- The output current of the power supply could be dimmed between 10%-100% by trailing edge or leading edge dimmers.
- Recommended dimmers: Leviton Decora-6631, Lutron TG-603PGH, CTCL-153PDH, TGCL-153PH, DV-600PR etc.
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- Efficiency $\geq 85\%$ (AC120V, full load)
- Warranty: 5 years

Standards

UL1310
CSA C22.2 NO. 250.13-12;
UL8750 CSA C22.2 NO. 223-M91



Dimensions: (inches/mm)

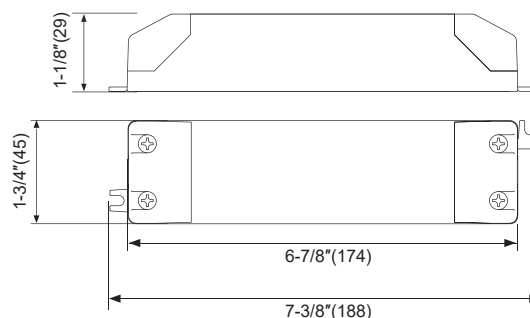

Characteristics

Rated input voltage: AC100-120V 50/60Hz (power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	λ	t_a	L x W x H	Approval
SLD40-24VL-US-A	DC24V	0-40W(Without dimmer) 5-40W(With dimmer)	0.95	-4-95°F (-20-35°C)	5-1/4"x1-3/4"x11/16" (188x45x29mm)	UL LISTED

Listed driver configuration



Input Plug	Input Cable Length	Model No.	Splitter	Output Cable Length
NA1 - NA1	59 - 59"	4024TLA-SLT20-24VL-UN1-A	DG - DG238	6 - 6"

Example:NA159-4024TLA-DG6