


UL Listed LED Power Supply

Daisy chain driver

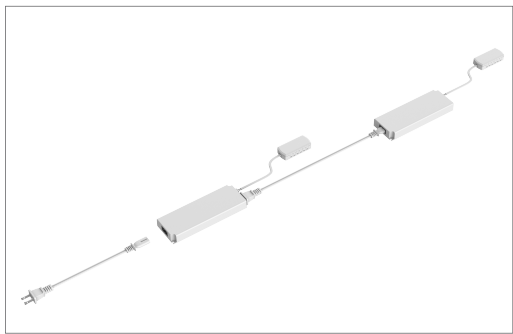

Features


- UL Listed power supply for constant voltage LED lamp
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- UL8750 Class 2 output
- Soft on Technology
- No load power consumption <0.5W
- Efficiency ≥87% (AC120V, full load)
- Up to 12 drivers maximum interconnected

Standards

UL8750
UL1310
FCC15B

PATENT

Dimensions: (inches/mm)

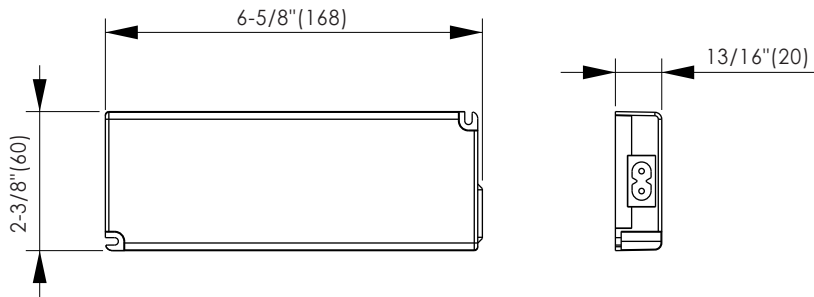


Characteristics

Rated input voltage: AC 100-120V 50/60Hz (power factor measured at AC120V and full load)

| Model No. | Constant output voltage | Load | λ | t_a | L x W x H | Approval |
|------------------|-------------------------|-------|-----------|-----------------------|--|----------|
| SLT40-24VL-UN1-A | DC24V | 0-40W | 0.95 | -4-95°F (-20-35°C) | 6-5/8"x2-3/8"x1-3/16" (168x60x30mm) | Pending |

Wiring Diagram

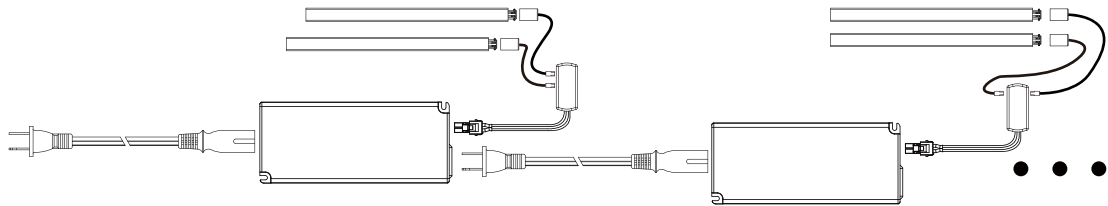

Listed driver configuration

| Input Plug | Input Cable Length | Model No. | Splitter | Output Cable Length |
|------------|--------------------|----------------------------|---|---------------------|
| NA1 - NA1 | 59 - 59" | 4024LDC - SLT40-24VL-UN1-A | [blank] - None 12A - JB-12A 6V - JB-6-4 | 6- 6" |

Example:NA159-4024LDC