


# UL Listed LED Power Supply

## Daisy chain driver

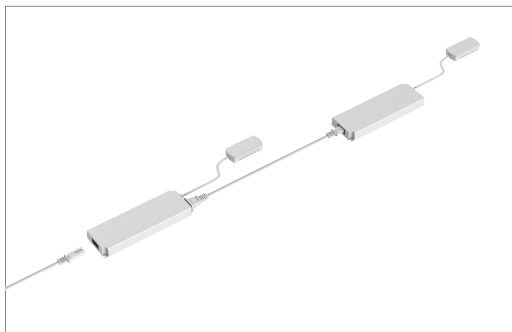

### Features


- UL Listed power supply for constant voltage LED lamp
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- UL8750 Class 2 output
- No load power consumption <0.5W
- Efficiency ≥91% (AC120V, full load)
- Up to 8 drivers maximum interconnected

### Standards

UL8750  
UL1310  
FCC15B

PATENT

### Dimensions: (inches/mm)

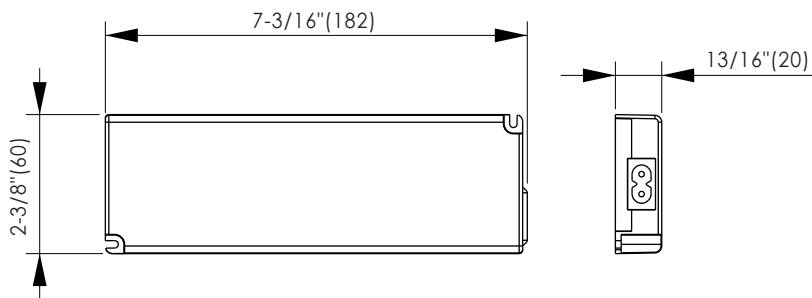


### Characteristics

Rated input voltage: AC 100-120V 50/60Hz (power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	$\lambda$	$t_a$	L x W x H	Approval
SLT75-24VL-UN2-A	DC24V	0-75W	0.95	-4-95°F (-20-35°C)	7-1/16"x2-3/8"x1-3/16" (180x60x30mm)	Pending

### Wiring Diagram

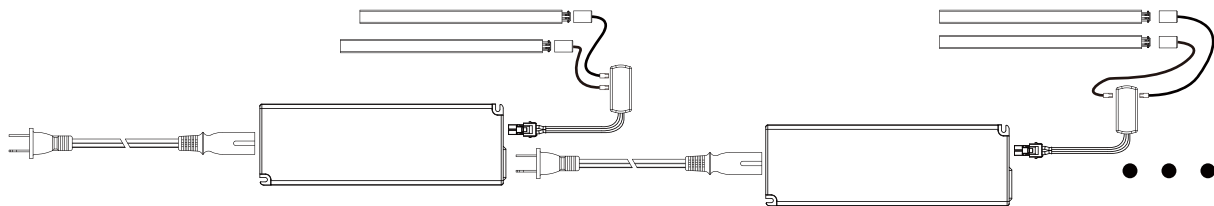

### Listed driver configuration

Input Plug	Input Cable Length	Model No.	Splitter	Output Cable Length
NA1 - NA1	59 - 59"	7524LDC - SLT75-24VL-UN2-A	12A - JB-12A 6V - JB-6-4	6 - 6"

Example: NA159-7524LDC-12A6