

LED Power Supply

CV Version



Features


- Universal input voltage(120-277Vac)
- Metal housing
- UL 8750 class 2 output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- No load power consumption≤0.5W
- THD <20% (load between 7~96W)@120VAC
- Efficiency≥85% (AC120V, full load)
- Warranty: 5 years

Standards

UL1310
CSA C22.2 NO. 250.13-12
UL8750
CSA C22.2 NO. 223-M91
EN 61347-1 EN61347-2-13
EN55015 EN61547
EN61000-3-2 EN61000-3-3



Dimensions: (inches/mm)

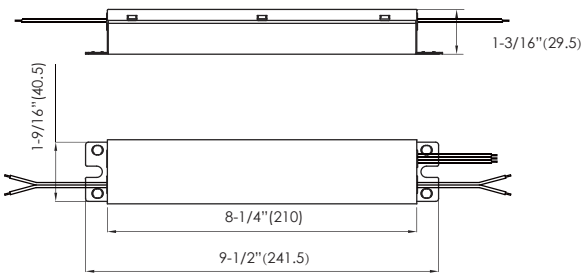

Characteristics

Rated input voltage: AC100-240V 50/60Hz (power factor measured at AC120V and full load)

Model No.	Constant output voltage	Load	λ	t_a	L x W x H	Approval
SLD96-24VC-UN1	DC24V	0-96W	0.95	-4~113°F (-20~45°C)	9-1/2"x1-9/16"x1-3/16" (241.5x40.5x29.5mm)	