

## SLPU-2P1U1C-BK



### ELECTRICAL

With 1 × USB-A charger port (Rated 5Vdc, 3.1A)  
 With 1 × USB-C charger port  
 (Rated 5VDC 3.1A, 9VDC 2A, 12VDC 1.5A)  
 USB charger built-in open circuit, short circuit, over load protection  
 2 × TR AC Receptacles, rated 15A, 125Vac  
 10' 14 AWG x 3C power cord with 5-15P plug

### MECHANICAL

Recessed mounting


### CERTIFICATION

FCC compliant and UL Listed

### WARRANTY


5 Years

### Dimension(inches/mm)

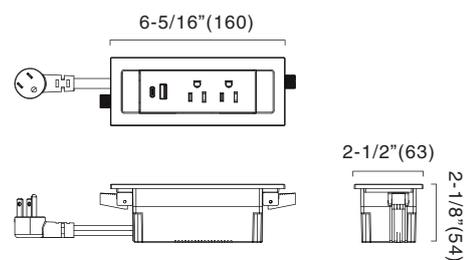

### Installation

Cut hole size:  
 5.94"×2.09"(151mm×53mm)

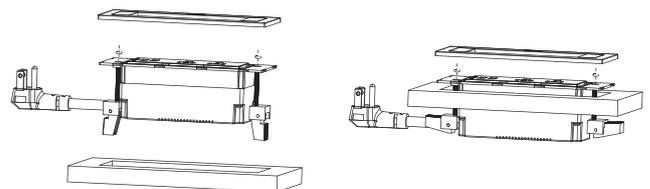

\*Thickness of the board:8~35mm

## SLPU-2P1U1C-WH



### ELECTRICAL

With 1 × USB-A charger port (Rated 5Vdc, 3.1A)  
 With 1 × USB-C charger port  
 (Rated 5VDC 3.1A, 9VDC 2A, 12VDC 1.5A)  
 USB charger built-in open circuit, short circuit, over load protection  
 2 × TR AC Receptacles, rated 15A, 125Vac  
 10' 14 AWG x 3C power cord with 5-15P plug

### MECHANICAL

Recessed mounting


### CERTIFICATION

FCC compliant and UL Listed

### WARRANTY


5 Years

### Dimension(inches/mm)

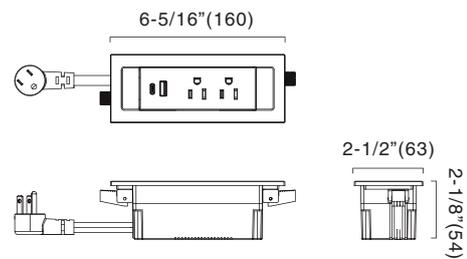

### Installation

Cut hole size:  
 5.94"×2.09"(151mm×53mm)

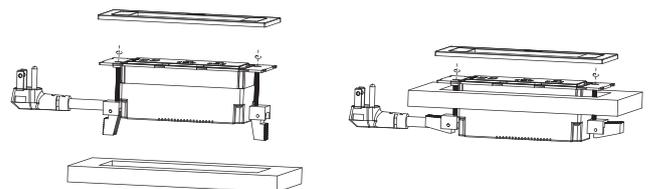

\*Thickness of the board:8~35mm

## SLPU-2P1U1C-NI



### ELECTRICAL

With 1 × USB-A charger port (Rated 5Vdc, 3.1A)  
 With 1 × USB-C charger port  
 (Rated 5VDC 3.1A, 9VDC 2A, 12VDC 1.5A)  
 USB charger built-in open circuit, short circuit, over load protection  
 2 × TR AC Receptacles, rated 15A, 125Vac  
 10' 14 AWG x 3C power cord with 5-15P plug

### MECHANICAL

Recessed mounting


### CERTIFICATION

FCC compliant and UL Listed

### WARRANTY


5 Years

### Dimension(inches/mm)

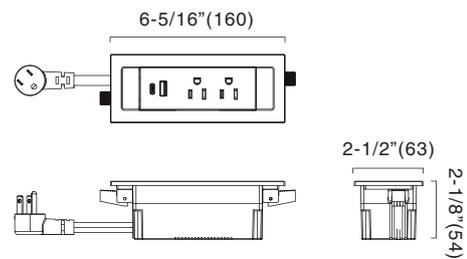

### Installation

Cut hole size:  
 5.94"×2.09"(151mm×53mm)

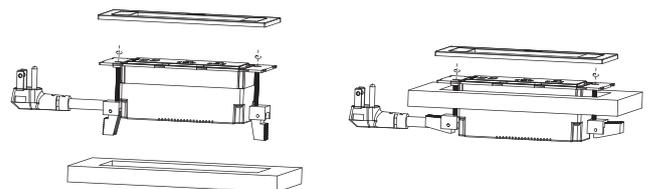

\*Thickness of the board:8~35mm