





- Anti-glare design
- Delicate and exquisite shape
- Color consistency: 3-step MacAdam Ellipse
- Good RA>90, R9>50
- High output: 6W/ft, 540lm/ft
Low output: 3W/ft, 300lm/ft
- Lifetime: >70,000hrs (ta=95°F, L70)
- Ta: -4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy
- Standards: UL2108/ IES LM-79 / LM-80
- IP rating: IP20 (for dry locations)
- Warranty: 5 year limited warranty




APPLICATION

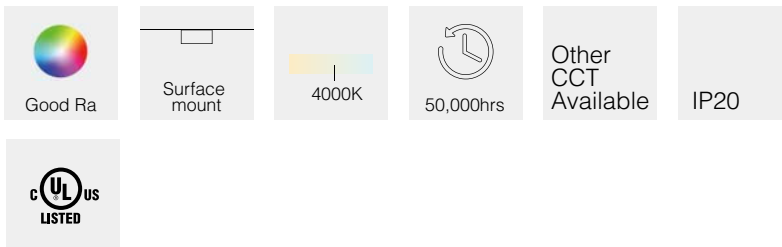

Dimensions: inches, (mm)

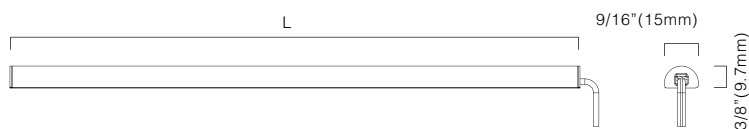


Photometrics

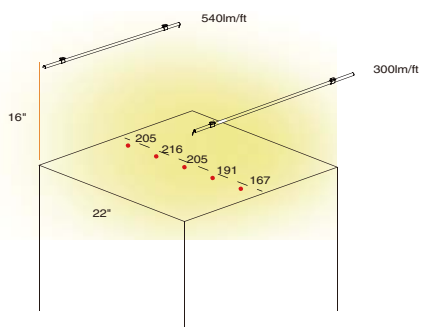

01 GLOW4 Display Lighting

How to order using our catalog numbers

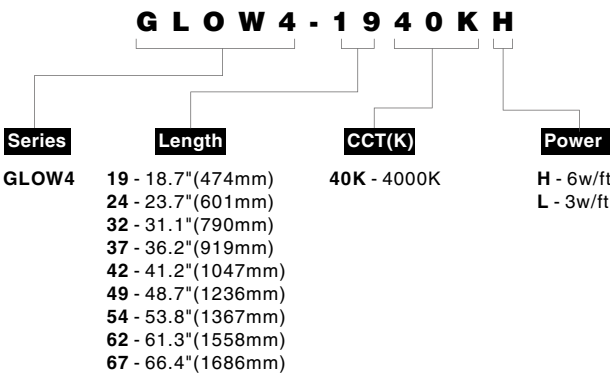

Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (lm)
GLOW4-1940KH	GLOW4-L49-24V-K	24	92	8.3	770
GLOW4-2440KH	GLOW4-L63-24V-K	24	92	11.3	990
GLOW4-3240KH	GLOW4-L84-24V-K	24	92	15	1320
GLOW4-3740KH	GLOW4-L98-24V-K	24	92	17.5	1540
GLOW4-4240KH	GLOW4-L112-24V-K	24	92	20	1760
GLOW4-4940KH	GLOW4-L133-24V-K	24	92	23.8	2090
GLOW4-5440KH	GLOW4-L147-24V-K	24	92	26.3	2310
GLOW4-6240KH	GLOW4-L168-24V-K	24	92	30	2640
GLOW4-6740KH	GLOW4-L182-24V-K	24	92	32.5	2860
GLOW4-1940KL	GLOW4-L49-24V-K1	24	92	4.4	462
GLOW4-2440KL	GLOW4-L63-24V-K1	24	92	5.65	594
GLOW4-3240KL	GLOW4-L84-24V-K1	24	92	7.5	792
GLOW4-3740KL	GLOW4-L98-24V-K1	24	92	8.75	924
GLOW4-4240KL	GLOW4-L112-24V-K1	24	92	10	1056
GLOW4-4940KL	GLOW4-L133-24V-K1	24	92	11.9	1254
GLOW4-5440KL	GLOW4-L147-24V-K1	24	92	13.15	1386
GLOW4-6240KL	GLOW4-L168-24V-K1	24	92	15	1584
GLOW4-6740KL	GLOW4-L182-24V-K1	24	92	16.25	1716

* Included: 1pc LED fixture

Installation

