








01 MINI TELEP Ceiling Lighting




- Anti-glare design
- Compatible with 3 circuits track
- Available with swivel heads, allows swiveling up to 90 ° and rotation of 350°
- Lifetime: 50,000hrs (L80, ta=95°F, 35°C)
- Ta:-4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy

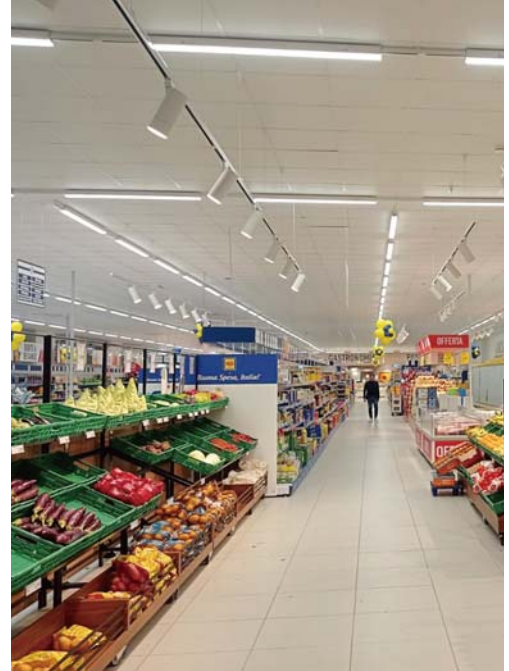


APPLICATION



Dimensions: inches, (mm)

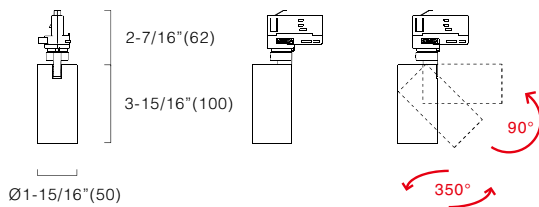


Photometrics

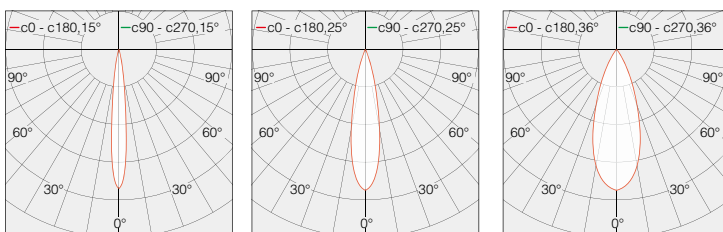

01 MINI TELEP Ceiling Lighting

How to order using our catalog numbers

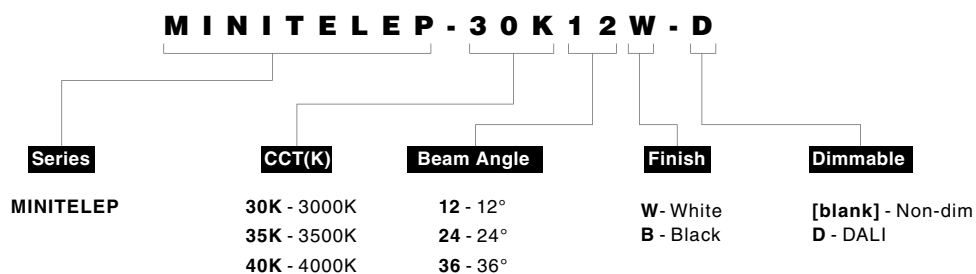

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	Luminous flux (lm)
MINITELEP-30K12W	MINITELEP-R1-277V	120-277	92	11	12°	770
MINITELEP-35K12W						803
MINITELEP-40K12W						825
MINITELEP-30K24W				14	24°	1324
MINITELEP-35K24W						1383
MINITELEP-40K24W						1420
MINITELEP-30K36W				14	36°	1400
MINITELEP-35K36W						1470
MINITELEP-40K36W						1498
MINITELEP-30K12B				11	12°	770
MINITELEP-35K12B						803
MINITELEP-40K12B						825
MINITELEP-30K24B				14	24°	1324
MINITELEP-35K24B						1383
MINITELEP-40K24B						1420
MINITELEP-30K36B				14	36°	1400
MINITELEP-35K36B						1470
MINITELEP-40K36B						1498
MINITELEP-30K12W-D	MINITELEP-R1-277V-D	120-277	92	11	12°	770
MINITELEP-35K12W-D						803
MINITELEP-40K12W-D						825
MINITELEP-30K24W-D				14	24°	1324
MINITELEP-35K24W-D						1383
MINITELEP-40K24W-D						1420
MINITELEP-30K36W-D				14	36°	1400
MINITELEP-35K36W-D						1470
MINITELEP-40K36W-D						1498
MINITELEP-30K12B-D				11	12°	770
MINITELEP-35K12B-D						803
MINITELEP-40K12B-D						825
MINITELEP-30K24B-D				14	24°	1324
MINITELEP-35K24B-D						1383
MINITELEP-40K24B-D						1420
MINITELEP-30K36B-D				14	36°	1400
MINITELEP-35K36B-D						1470
MINITELEP-40K36B-D						1498