





01 TRACK PENDANT2 L Ceiling Lighting



- Anti-glare design
- Compatible with 3-phase universal track
- 8' aircraft cable, field adjustable
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta:-4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy



APPLICATION




Other
CCT
Available


IP20



Dimensions: inches, (mm)

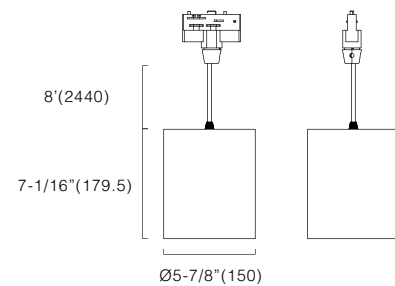


Photometrics

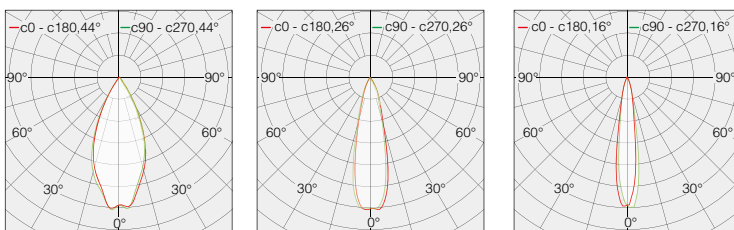

03 TRACK PENDANT2 L Ceiling Lighting

How to order using our catalog numbers

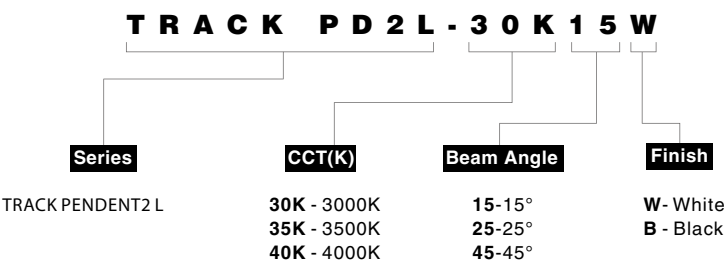

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	Luminous flux (lm)
TRACK PD2L-30K15W	TRACK PENDANT2 MO-R1-277V-R1	120-277	92	40	15°	3172
TRACK PD2L-35K15W						3311
TRACK PD2L-40K15W						3400
TRACK PD2L-30K25W					25°	3545
TRACK PD2L-35K25W						3701
TRACK PD2L-40K25W						3800
TRACK PD2L-30K45W					45°	3919
TRACK PD2L-35K45W						4091
TRACK PD2L-40K45W						4200
TRACK PD2L-30K15B					15°	3172
TRACK PD2L-35K15B						3311
TRACK PD2L-40K15B						3400
TRACK PD2L-30K25B					25°	3545
TRACK PD2L-35K25B						3701
TRACK PD2L-40K25B						3800
TRACK PD2L-30K45B					45°	3919
TRACK PD2L-35K45B						4091
TRACK PD2L-40K45B						4200