










TELEP3

- Anti-glare is achieved through patented optical design


- Anti-glare design
- Compatible with 3 circuits track
- Minimized direct light to shoppers' eyes
- Available with swivel heads, allows swiveling up to 90 ° and rotation of 350°
- Lifetime: 50,000hrs (L80, ta=95°F, 35°C)
- Ta:-4°F~95°F (-20°C~35°C)
- Material: Aluminum alloy






APPLICATION




Dimensions: inches, (mm)



Photometrics



How to order using our catalog numbers

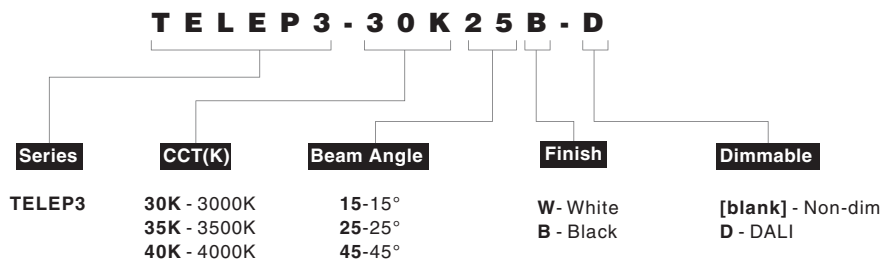

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	Luminous flux (lm)
TELEP3-30K15W	TELEP3-R1-277V	120-277	92	28	15°	2690
TELEP3-35K15W						2744
TELEP3-40K15W						2800
TELEP3-30K25W					25°	3230
TELEP3-35K25W						3290
TELEP3-40K25W						3360
TELEP3-30K45W					45°	3360
TELEP3-35K45W						3430
TELEP3-40K45W						3500
TELEP3-30K15B					15°	2690
TELEP3-35K15B						2744
TELEP3-40K15B						2800
TELEP3-30K25B	TELEP3-R1-277V-D	120-277	92	28	25°	3230
TELEP3-35K25B						3290
TELEP3-40K25B						3360
TELEP3-30K45B					45°	3360
TELEP3-35K45B						3430
TELEP3-40K45B						3500
TELEP3-30K15W-D					15°	2690
TELEP3-35K15W-D						2744
TELEP3-40K15W-D						2800
TELEP3-30K25W-D					25°	3230
TELEP3-35K25W-D						3290
TELEP3-40K25W-D						3360
TELEP3-30K45W-D					45°	3360
TELEP3-35K45W-D						3430
TELEP3-40K45W-D						3500
TELEP3-30K15B-D	TELEP3-R1-277V-D	120-277	92	28	15°	2690
TELEP3-35K15B-D						2744
TELEP3-40K15B-D						2800
TELEP3-30K25B-D					25°	3230
TELEP3-35K25B-D						3290
TELEP3-40K25B-D						3360
TELEP3-30K45B-D					45°	3360
TELEP3-35K45B-D						3430
TELEP3-40K45B-D						3500

SELF Electronics USA Corporation