



01 S-SHINE Ceiling Lighting




- 4" LED recessed downlight
- Easy installation for new construction
- Anti-glare design
- Aiming adjustment: 25° vertical rotation
- Lifetime: 50,000hrs (ta=95°F, 35°C)
- Ta: -4°F~95°F(-20°C~25°C)
- Material: Aluminum alloy

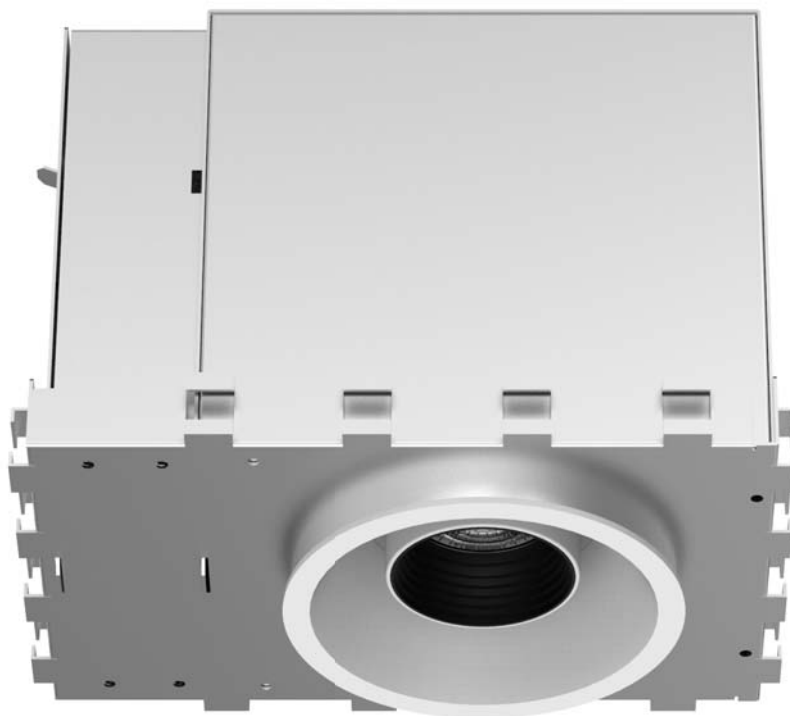


APPLICATION

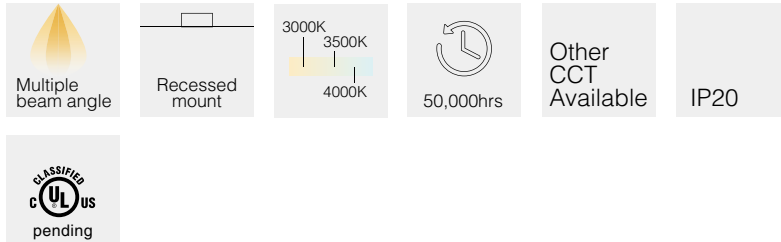

Dimensions: inches, (mm)

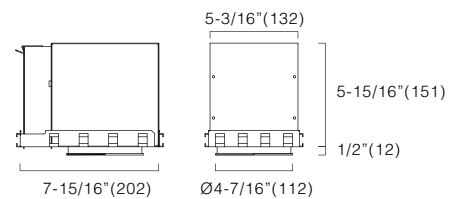


Photometrics

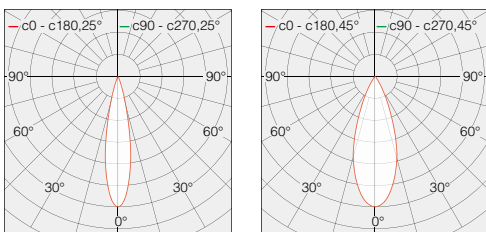

03 S-SHINE Ceiling Lighting

How to order using our catalog numbers

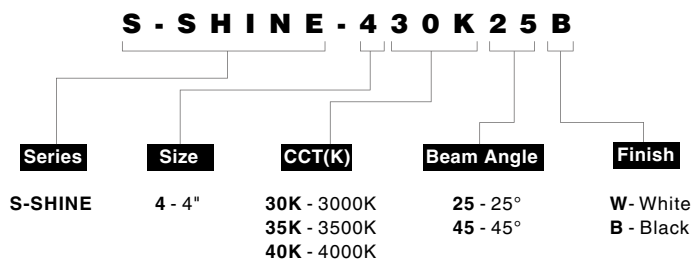

Specifications

Catalog No.	Model	Rated Input (VAC)	Ra	Power (W)	Beam angle	Luminous flux (lm)
S-SHINE-430K25W	S-SHINE-US-D	120-277	90	20	25°	1488
S-SHINE-435K25W						1520
S-SHINE-440K25W						1552
S-SHINE-430K45W					45°	1520
S-SHINE-435K45W						1568
S-SHINE-440K45W						1600
S-SHINE-430K25B					25°	1488
S-SHINE-435K25B						1520
S-SHINE-440K25B						1552
S-SHINE-430K45B					45°	1520
S-SHINE-435K45B						1568
S-SHINE-440K45B						1600

Installation

