

# Flexible Strip Lighting

## FLEX2 HD



- Customized design length
- Flexible and compact design

# Flexible Strip Lighting

## FLEX2 HD




- Plug & play (External power supply)
- Customized design length
- Flexible and compact design
- Bright and constant illuminance for display area
- Linkable, max. linkable length: 16'
- Lifetime: 50,000hrs (Ta=77°F, 25°C)
- Ta: -4°F~77°F (-20°C~25°C)
- 400lm/ft (@3W/ft)
- 140lm/ft (@1W/ft)
- Other color temp available



Dimensions: inches, (mm)

Minimum cuttable length: 1.97"



How to order using our catalog numbers  
Example: FLEX2 HD-19727K


Series	Length	CCT (K)	Power	Beam Angle	Finish	Installation
FLEX2 HD	197 - 196.9"(5001.5mm)	27K - 2700K 30K - 3000K	[blank] - 3W/ft 1 - 1W/ft	[blank] - 120°	[blank] - White	[blank] - Adhesive Tape

### Specifications

Catalog No.	Model	Rated Input (VDC)	Ra	Power (W)	Luminous flux (TYP@3000K)lm	75W (NA159-7524LA-6V6)
FLEX2 HD-19727K FLEX2 HD-19730K	FLEX2-F700-24V-11	24	85	50	6600	1pc <sup>[1]</sup>
FLEX2 HD-19727K1 FLEX2 HD-19730K1	FLEX2-F700-24V-12	24	85	16.7	2340	3pcs <sup>[1]</sup>

\* Included: 1pc LED fixture with double-sided adhesive tape.  
[1]: Max. pcs per UL listed LED power supply.


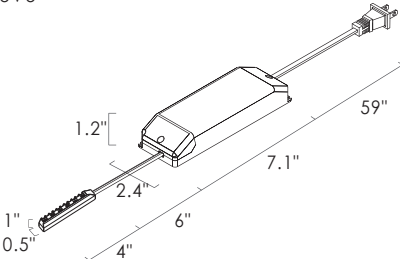
### Photometrics








# Flexible Strip Lighting

## FLEX2 HD

### Accessories



Catalog No.	Description	Length (inch)
IC-RB-59	 Input cable (must be between the light and splitter)	59"
NA159-7524LA-6V6	 Model: SLT75-24VL-2A Matching driver, max. 75W. Input: 100-120VAC NA plug 1 + 59" cable. Output: 24VDC 6-way splitter JB-6-4 + 6" cable.	

### Accessories(optional)

Catalog No.	Description	Length
SC-RB-2	 Soft connector	2"
SC-RB-12	 Soft connector	12"
HC-RB	 Hard connector	-
MCN-SGF-44	 Mounting channel with cover, included 2pcs end caps and 2pcs clips	43.7"
MCN-SGF-95	 Mounting channel with cover, included 2pcs end caps and 4pcs clips	94.5"

# Flexible Strip Lighting

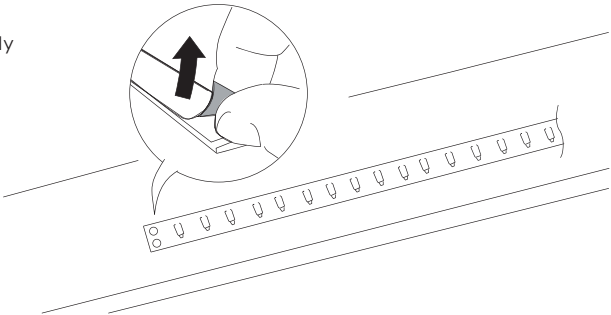
## FLEX2 HD

Accessories(optional)	Catalog No.	Description	Length
	MCN-SGW-44	<div><div>11/16"(16.8)</div><div>7/16"(10.5)</div><div>7/16"(11.8)</div></div> <div>Mounting channel with cover, included 2pcs end caps and 2pcs clips</div>	43.7"
	MCN-SGW-95	<div><div>11/16"(16.8)</div><div>7/16"(10.5)</div><div>7/16"(11.8)</div></div> <div>Mounting channel with cover, included 2pcs end caps and 4pcs clips</div>	94.5"

Mounting channel with cover, included 2pcs end caps and 4pcs clips

### Installation

Installation 1  
LED fixture directly



Installation 2  
MCN-RB installation

